


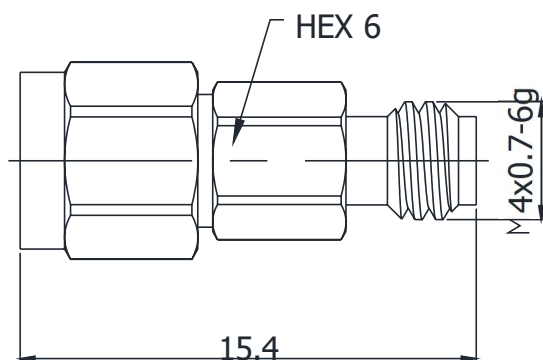

Dimensions are in mm

Configuration

Connector	1.0mm Male-Female
Connector Impedance	50 Ohms

Electrical Specifications

Product No.	Frequency (GHz)	Attenuation Value (dB)	Attenuation Accuracy (dB)	VSWR
1.0-CA103-E	DC-110	3	-1.0/+2.0	1.60
1.0-CA106-E	DC-110	6	-1.0/+2.0	1.60
1.0-CA110-E	DC-110	10	-1.0/+2.0	1.60
1.0-CA120-E	DC-110	20	-2.0/+1.0	1.60

Materials Information

Male Center Contact	Brass Gold Plated
Female Center Contact	CuBe Gold Plated
Body	Stainless Steel
Dielectric	PEI

Environmental Data

Temperature Range	-55°C to +125°C
2011/65/EU(RoHS)	Compliant