


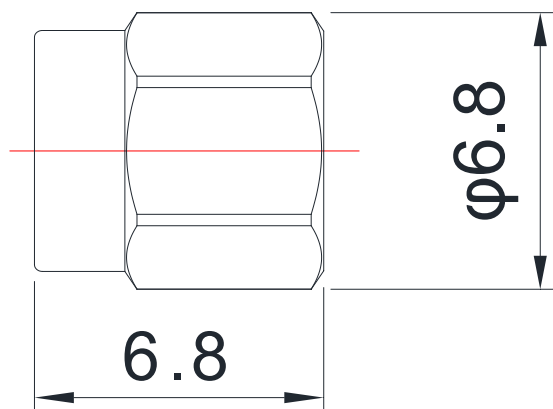

*Dimensions are in mm

Configuration

Connector 1 Type	1.0mm Male
Connector 1 Impedance	50 Ohms
Connector 1 Polarity	Standard

Electrical Specifications

Frequency	DC to 110 GHz
Return loss/VSWR	≤ 1.56
Power Handling	≤ 1 Watts Average at 25°C
Peak Power	20Watts (5 μ Sec Pulse Width , 2% Duty Cycle)

Materials Information


Center Contact	Beryllium Bronze Gold Plated
Outer Contact	Stainless Steel Passivation

Environmental Data

Operating Temperature	-55°C to +125°C
Storage Temperature	-55°C to +125°C
2011/65/EU(RoHS)	Compliant

While the information has been carefully compiled to the best of our knowledge, nothing is intended as representation or warranty on our part and no statement herein shall be construed as recommendation to infringe existing patents. In the effort to improve our products, we reserve the right to make changes judged to be necessary.

Typical Performance Data:

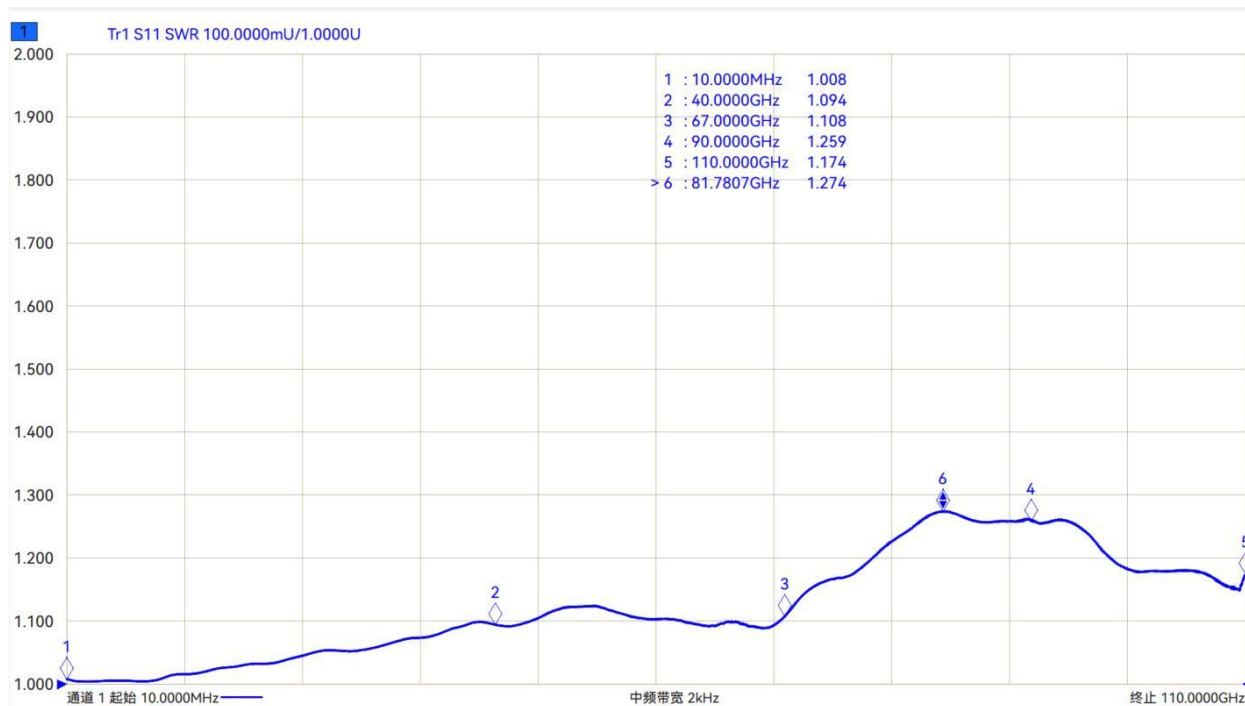

Note: Above data is for ref only, actual data may vary from unit to unit depending on operating environment and other factors like material lots etc.