
## ATTENUATOR DATASHEET



## 1.85MM ATTENUATOR

## 1.85-CA106



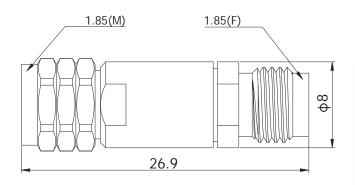

## Dimensions are in mm

Configuration		
Connector 1 Type	1.85mm Male	
Connector 1 Impedance	50 Ohms	
Connector 1 Polarity	Standard	
Connector 2 Type	1.85mm Female	
Connector 2 Impedance	50 Ohms	
Connector 2 Polarity	Standard	
Electrical Specificatio	ns	
Frequency	DC to 67 GHz	
Attenuation Value (dB)	6	
Attenuation Accuracy (dB)	-1.0/+1.5	
Average Power(W)	2	
VSWR /Return Loss	1.45 to 67 GHz	
Materials Information	า	
Center Contact	CuBe Gold Plated	
Outer Contact	Stainless Steel	
Body	Stainless Steel	
Dielectric	PEI	
Environmental Data		
Temperature Range	-55°C to +125°C	
2002/95/EC(RoHS)	Compliant	

While the information has been carefully compiled to the best of our knowledge, nothing is intended as representation or warranty on our part and no statement herein shall be construed as recommendation to infringe existing patents. In the effort to improve our products, we reserve the right to make changes judged to be necessary.

Gwave Technology Inc.	Tel.: +86 10 86484190	Page
4 <sup>th</sup> Floor,New Material Plaza,Yongfeng Hi-Tech Base,Haidian	Fax: +86 10 86484190-0	
District,Beijing ,China(100094) www.gwave-tech.com	email: gwave@gwave-tech.com	1/1