
ADAPTOR DATASHEET



TNC(MALE)-BNC(MALE)

TNC/BNC-JJ

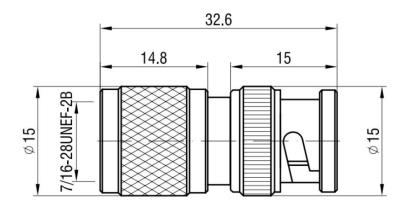

*Dimensions are in mm

Configuration		
Connector 1 Type	TNC Male	
Connector 1 Impedance	50 Ohms	
Connector 1 Polarity	Standard	
Connector 2 Type	BNC Male	
Connector 2 Impedance	50 Ohms	
Connector 2 Polarity	Standard	
Connector Mount Method	None	
Adapter Body Style	Straight	
	DC to 3 driz	
Electrical Specificatio Frequency	DC to 3 GHz	
Insortion Loss (dP)	3 4 4 4 4 1 1	
Insertion Loss (dB) VSWR /Return Loss	≤ 0.1 xSqt.(f_GHz) 1.3	
. ,	≤ 0.1 xSqt.(f_GHz) 1.3	
VSWR /Return Loss	≤ 0.1 xSqt.(f_GHz) 1.3	
VSWR /Return Loss Materials Information	≤ 0.1 xSqt.(f_GHz) 1.3	
VSWR /Return Loss Materials Information Center Contact	≤ 0.1 xSqt.(f_GHz) 1.3 Brass Gold Plated	
VSWR /Return Loss Materials Information Center Contact Outer Contact	≤ 0.1 xSqt.(f_GHz) 1.3 Brass Gold Plated Brass Nickel Plated	
VSWR /Return Loss Materials Information Center Contact Outer Contact Body	≤ 0.1 xSqt.(f_GHz) 1.3 Brass Gold Plated Brass Nickel Plated Brass Nickel Plated	
VSWR /Return Loss Materials Information Center Contact Outer Contact Body Dielectric	≤ 0.1 xSqt.(f_GHz) 1.3 Brass Gold Plated Brass Nickel Plated Brass Nickel Plated	

While the information has been carefully compiled to the best of our knowledge, nothing is intended as representation or warranty on our part and no statement herein shall be construed as recommendation to infringe existing patents. In the effort to improve our products, we reserve the right to make changes judged to be necessary.

Gwave Technology Inc.	
4th Floor, New Material Plaza, Yo	ngfeng Hi-Tech Base,Haidian
District, Beijing , China (100094)	www.gwave-tech.com

Tel.: +86 10 86484190 Fax: +86 10 86484190-0 email: gwave@gwave-tech.com Page

1/1