
ADAPTOR DATASHEET



Straight Waveguide Adaptor

WR10-1IN

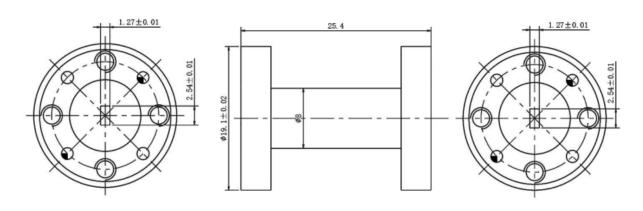

^{*}Dimensions are in mm

Configuration	
Waveguide Type	WR-10(BJ900)
Flange	FUGP900(UG-387/U-M)
Body Style	Straight
Electrical Specificat	ions
Frequency	75 to 110 GHz
Insertion Loss (dB)	≤ 0.3
VSWR /Return Loss	1.1
Materials Information	on
Body Material	Brass
Body Plating	Glod
body i lating	
Weight(g)	20
, -	

While the information has been carefully compiled to the best of our knowledge, nothing is intended as representation or warranty on our part and no statement herein shall be construed as recommendation to infringe existing patents. In the effort to improve our products, we reserve the right to make changes judged to be necessary.

Gwave Technology Inc. 4th Floor,New Material Plaza,Yongfeng Hi-Tech Base,Haidian District,Beijing ,China(100094) www.gwave-tech.com Tel.: +86 10 86484190 Fax: +86 10 86484190-0 email: gwave@gwave-tech.com Page

1/1