
ADAPTOR DATASHEET



Straight Waveguide Adaptor

WR12-1IN

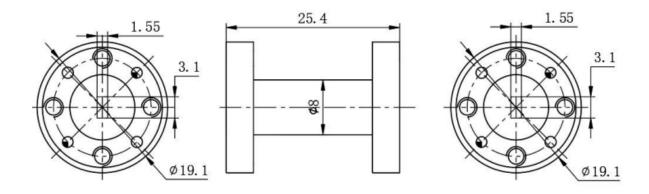

*Dimensions are in mm

Waveguide Type	WR-12(BJ740)
Flange	FUGP740(UG-387/U)
Body Style	Straight
Electrical Specificat	tions
Frequency	60 to 90 GHz
Insertion Loss (dB)	≤ 0.2
VSWR /Return Loss	1.1
Materials Informati	on
Body Material	Brass
Body Plating	Glod
•	Glod 20
Body Plating	20

While the information has been carefully compiled to the best of our knowledge, nothing is intended as representation or warranty on our part and no statement herein shall be construed as recommendation to infringe existing patents. In the effort to improve our products, we reserve the right to make changes judged to be necessary.

Gwave Technology Inc. 4th Floor,New Material Plaza,Yongfeng Hi-Tech Base,Haidian District,Beijing ,China(100094) www.gwave-tech.com Tel.: +86 10 86484190 Fax: +86 10 86484190-0 email: gwave@gwave-tech.com Page

1/1