
ADAPTOR DATASHEET



Waveguide To Coax Adaptor

WR137/N-K-V

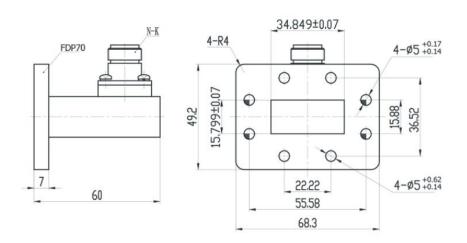

*Dimensions are in mm

Configuration		
Connector Type	N Female	
Connector Impedance	50 Ohms	
Connector Polarity	Standard	
Waveguide Type	WR-137	
Flange	FDP70	
Adapter Body Style	Right Angle	
Electrical Specifications		
Frequency	5.38 to 8.17 GHz	
Insertion Loss (dB)	≤ 0.5	
VSWR /Return Loss	1.25	
Materials Information		
Weight(g)	124	
Body Material	Aluminum	
Environmental Data		
Temperature Range	-55°C to +125°C	
2011/65/EU(RoHS)	Compliant	

While the information has been carefully compiled to the best of our knowledge, nothing is intended as representation or warranty on our part and no statement herein shall be construed as recommendation to infringe existing patents. In the effort to improve our products, we reserve the right to make changes judged to be necessary.

Gwave Technology Inc.	
4th Floor, New Material Plaza, Yo	ngfeng Hi-Tech Base,Haidian
District, Beijing , China (100094)	www.gwave-tech.com

Tel.: +86 10 86484190 Fax: +86 10 86484190-0 email: gwave@gwave-tech.com Page

1/1