


WR-90 to SMA Female Right Angle Waveguide to Coax Adapters with UBR100 Flange,8.2-12.4GHz

WR90/SMA-UBR100-K-V

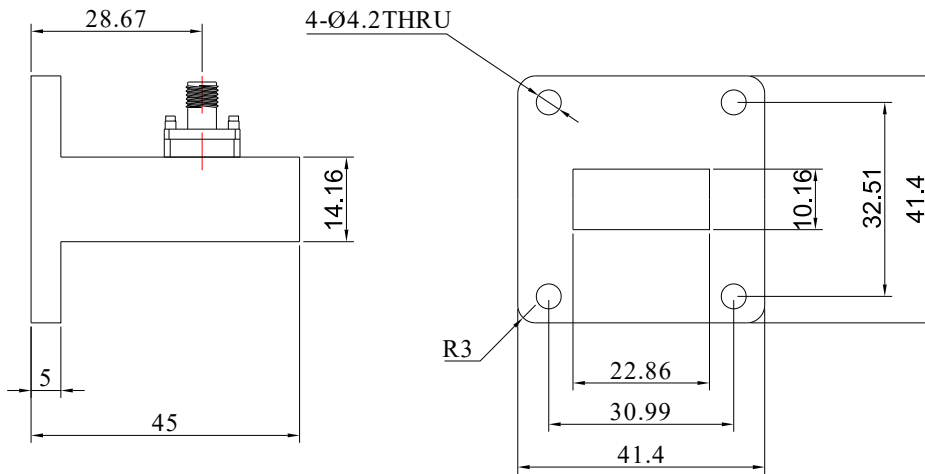

Dimensions are in mm

Product Configuration

Body Style	Right Angle
Flange Designation	UBR100
Waveguide Size	WR-90
Connector Series	SMA
Connector Polarity	Standard
Connector Gender	Female
Connector Impedance (Ohm)	50

Electrical Specifications

VSWR	1.25
Insertion Loss	≤0.25
Frequency Range	8.2-12.4GHz

Mechanical Data

Weight	71.85
Body Material	Aluminum

Environmental Specifications

RoHS Compliant	Yes
Operating Temperature Range	-30 °C to +70 °C

NOTE: information herein is believed by Gwave to be accurate. However, Gwave assumes no responsibility for any omissions or errors in accuracies for its use or for any infringements of patents or other rights of third parties that may result from its use. Data is intended for informational purpose only and does not constitute a contract of sale or any express or implied warranty, including any warranty of merchant ability or fitness for a particular purpose.