
ADAPTOR DATASHEET



2.92MM(MALE)-GPO(SMP)(FEMALE)

2.92/GPO-JK

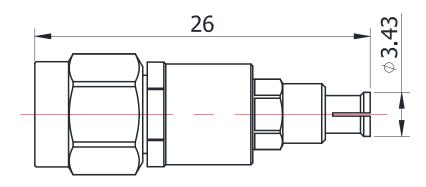

*Dimensions are in mm

onfiguration	
Connector 1 Type	2.92mm Male
Connector 1 Impedance	50 Ohms
Connector 1 Polarity	Standard
Connector 2 Type	GPO(SMP) Female
Connector 2 Impedance	50 Ohms
Connector 2 Polarity	Standard
Connector Mount Method	None
Adapter Body Style	Straight
Electrical Specificatio Frequency	DC to 40 GHz
Frequency	DC to 40 GHz
Frequency Insertion Loss (dB) Return Loss	DC to 40 GHz ≤ 0.05 xSqt.(f_GHz) 1.25
Frequency Insertion Loss (dB)	DC to 40 GHz ≤ 0.05 xSqt.(f_GHz) 1.25
Frequency Insertion Loss (dB) Return Loss	DC to 40 GHz ≤ 0.05 xSqt.(f_GHz) 1.25
Frequency Insertion Loss (dB) Return Loss	DC to 40 GHz ≤ 0.05 xSqt.(f_GHz) 1.25
Frequency Insertion Loss (dB) Return Loss Materials Information Center Contact	DC to 40 GHz ≤ 0.05 xSqt.(f_GHz) 1.25 CuBe Gold Plated
Frequency Insertion Loss (dB) Return Loss	DC to 40 GHz ≤ 0.05 xSqt.(f_GHz) 1.25 CuBe Gold Plated Stainless Steel & CuBe Gold Plated
Frequency Insertion Loss (dB) Return Loss	DC to 40 GHz ≤ 0.05 xSqt.(f_GHz) 1.25 CuBe Gold Plated Stainless Steel & CuBe Gold Plated Stainless Steel
Frequency Insertion Loss (dB) Return Loss	DC to 40 GHz ≤ 0.05 xSqt.(f_GHz) 1.25 CuBe Gold Plated Stainless Steel & CuBe Gold Plated Stainless Steel

While the information has been carefully compiled to the best of our knowledge, nothing is intended as representation or warranty or our part and no statement herein shall be construed as recommendation to infringe existing patents. In the effort to improve ou products, we reserve the right to make changes judged to be necessary.

Gwave Technology Co.,Ltd.
No.33 Building,Hanjiachuan Yard,Haidian District,Beijing
China(100094) www.gwave-tech.com

Tel.: +86 10 62450051/52 Fax: +86 10 62450053 Email: gwave@gwave-tech.com Page

1/1