
ADAPTOR DATASHEET



7/16(MALE)-N(MALE)

716/N-JJ

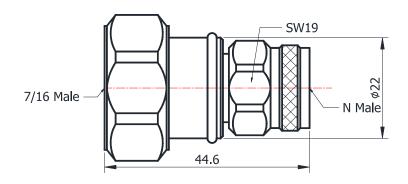

*Dimensions are in mm

Configuration		
Connector 1 Type	7/16 Male	
Connector 1 Impedance	50 Ohms	
Connector 1 Polarity	Standard	
Connector 2 Type	N Male	
Connector 2 Impedance	50 Ohms	
Connector 2 Polarity	Standard	
Connector Mount Method	None	
Adapter Body Style	Straight	
Electrical Specification Frequency	DC to 7.5 GHz	
Froguency	DC to 7.5 CHz	
Insertion Loss (dB)		
· ,	≤ 0.1 xSqt.(f_GHz)	
VSWR /Return Loss	1.15 to 7.5 GHz	
VSWR /Return Loss	1.15 to 7.5 GHz	
VSWR /Return Loss	1.15 to 7.5 GHz	
VSWR /Return Loss Materials Information	1.15 to 7.5 GHz	
VSWR /Return Loss Materials Information Center Contact	1.15 to 7.5 GHz CuBe Silver Plated	
VSWR /Return Loss Materials Information Center Contact Outer Contact	1.15 to 7.5 GHz CuBe Silver Plated Brass Trimetal Plated	
VSWR /Return Loss Materials Information Center Contact Outer Contact Nut	1.15 to 7.5 GHz CuBe Silver Plated Brass Trimetal Plated Brass Nickel Plated	
VSWR /Return Loss Materials Information Center Contact Outer Contact Nut Dielectric	1.15 to 7.5 GHz CuBe Silver Plated Brass Trimetal Plated Brass Nickel Plated	

While the information has been carefully compiled to the best of our knowledge, nothing is intended as representation or warranty on our part and no statement herein shall be construed as recommendation to infringe existing patents. In the effort to improve our products, we reserve the right to make changes judged to be necessary.

Gwave Technology Inc.	Tel.: +86 10 86484190	Page
4 th Floor,New Material Plaza,Yongfeng Hi-Tech Base,Haidian	Fax: +86 10 86484190-0	
District,Beijing ,China(100094) www.gwave-tech.com	email: gwave@gwave-tech.com	1/1