
#### CABLE ASSEMBLY DATASHEET



# RG316, FLEXIBLE CABLE, BNC(MALE)- SMC(FEMALE)

## **GAR3-BNCMSMCWF-XXX**

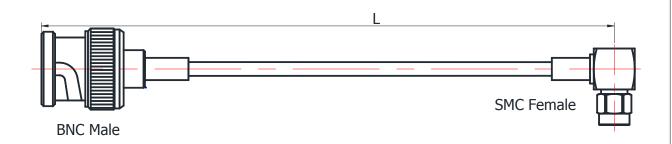

\* Label and Shrinking tube design depend on customer's request.

| Configuration                |                                      |  |
|------------------------------|--------------------------------------|--|
| Connector 1 Type             | BNC Male                             |  |
| Connector 1 Body Style       | Straight                             |  |
| Body Material and Plating    | Brass Nickel Plated                  |  |
| Connector 1 Mount Method     | None                                 |  |
| Connector 2 Type             | SMC Female                           |  |
| Connector 2 Body Style       | Right Angle                          |  |
| Body Material and Plating    | Brass Gold Plated                    |  |
| Connector 2 Mount Method     | None                                 |  |
| Cable Type                   | RG316                                |  |
| <b>Electrical Specificat</b> | ions                                 |  |
| Impedance                    | 50 Ω                                 |  |
| Frequency                    | DC to 3 GHz                          |  |
| Return Loss/VSWR             | 1.35 to 3 GHz                        |  |
| Phase Stability vs. Flexure  | N/A                                  |  |
| Amplitude Stability          | N/A                                  |  |
| Shielding Effectiveness      | <-80dB @ 1GHz                        |  |
| Phase Matching               | N/A                                  |  |
| Signal Delay                 | N/A                                  |  |
| Power Handling               | 88watt @ 1.5GHz at sea level,VSWR1.0 |  |
| <b>Environmental Data</b>    |                                      |  |
| Temperature Range            | -55°C to +165°C                      |  |
| 2002/95/EC(RoHS)             | Compliant                            |  |

Gwave Technology Co.,Ltd.

No.33 Building, Hanjiachuan Yard, Haidian District, Beijing

China(100094) <u>www.gwave-tech.com</u>

Tel.: +86 10 62450051/52 Fax: +86 10 62450053 Email: gwave@gwave-tech.com Page

1/2

#### CABLE ASSEMBLY DATASHEET



RG316, FLEXIBLE CABLE, BNC(MALE)- SMC(FEMALE)

## **GAR3-BNCMSMCWF-XXX**

| Cable Specifications       |                      |  |
|----------------------------|----------------------|--|
| Center Conductor           | Silver plated copper |  |
| Dielectric                 | Solid extruded PTFE  |  |
| Jacket                     | FEP                  |  |
| Capacitance(pF/m)          | 94                   |  |
| Velocity of propagation(%) | 70                   |  |
| Min. bending radius(mm)    | 15                   |  |
| Jacket Diameter(mm)        | 2.54                 |  |

## **Part Number List**

| Part Number         | Length [mm] | Insertion Loss ≤(dB) |      |  |
|---------------------|-------------|----------------------|------|--|
| Part Number         |             | 1GHz                 | 3GHz |  |
| GAR3-BNCMSMCWF-5000 | 5000±20     | 4.65                 | 7.85 |  |
| GAR3-BNCMSMCWF-2000 | 2000±10     | 1.95                 | 3.25 |  |
| GAR3-BNCMSMCWF-1000 | 1000±10     | 1.05                 | 1.75 |  |
| GAR3-BNCMSMCWF-500  | 500±10      | 0.65                 | 1.04 |  |

While the information has been carefully compiled to the best of our knowledge, nothing is intended as representation or warranty on our part and no statement herein shall be construed as recommendation to infringe existing patents. In the effort to improve our products, we reserve the right to make changes judged to be necessary.

Gwave Technology Co.,Ltd.

No.33 Building,Hanjiachuan Yard,Haidian District,Beijing
China(100094) www.gwave-tech.com

Tel.: +86 10 62450051/52 Fax: +86 10 62450053 Email: gwave@gwave-tech.com Page

2/2