
ADAPTOR DATASHEET



NMD3.5MM(FEMALE)-NMD3.5MM(MALE)

NMD3.5/NMD3.5-KJS

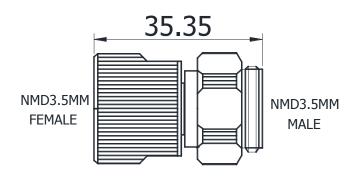

*Dimensions are in mm

Configuration		
Connector 1 Type	NMD3.5mm Female	
Connector 1 Impedance	50 Ohms	
Connector 1 Polarity	Standard	
Connector 2 Type	NMD3.5mm Male	
Connector 2 Impedance	50 Ohms	
Connector 2 Polarity	Standard	
Connector Mount Method	None	
Adapter Body Style	Straight	
Frequency	DC to 26.5 GHz	
Frequency	DC to 26.5 GHz	
Transition Loss (dD)	× 0.22	
Insertion Loss (dB) VSWR /Return Loss	≤ 0.23 1.15 to 26.5 GHz	
VSWR /Return Loss	1.15 to 26.5 GHz	
VSWR /Return Loss	1.15 to 26.5 GHz	
VSWR /Return Loss Materials Information	1.15 to 26.5 GHz	
VSWR /Return Loss Materials Information Center Contact	1.15 to 26.5 GHz CuBe Gold Plated	
VSWR /Return Loss Materials Information Center Contact Outer Contact	1.15 to 26.5 GHz CuBe Gold Plated Stainless Steel	
VSWR /Return Loss Materials Information Center Contact Outer Contact Body Dielectric	1.15 to 26.5 GHz CuBe Gold Plated Stainless Steel Stainless Steel	
VSWR /Return Loss Materials Information Center Contact Outer Contact Body	1.15 to 26.5 GHz CuBe Gold Plated Stainless Steel Stainless Steel	

While the information has been carefully compiled to the best of our knowledge, nothing is intended as representation or warranty on our part and no statement herein shall be construed as recommendation to infringe existing patents. In the effort to improve our products, we reserve the right to make changes judged to be necessary.

Gwave Technolog	y Co.,Ltd.
No.33 Building,Ha	njiachuan Yard,Haidian District,Beijing
China(100094)	www.gwave-tech.com

Tel.: +86 10 62450051/52 Fax: +86 10 62450053 Email: gwave@gwave-tech.com Page

1/1