
## ADAPTOR DATASHEET



## Waveguide To Coax Adaptor

## WR19/2.4-UG-K-V

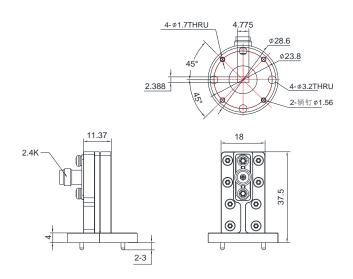

## \*Dimensions are in mm

Configuration		
Connector Type	2.4 Female	
Connector Impedance	50 Ohms	
Connector Polarity	Standard	
Waveguide Type	WR19	
Flange	UG-383/U	
Adapter Body Style	Right Angle	
Frequency Insertion Loss (dB)	39.2 to 52 GHz ≤ 0.50	
Frequency	39.2 to 52 GHz	
· ,		
VSWR /Return Loss Weight(g)	1.40 56.8	
Materials Information		
Body	Brass Gold Plated	
<b>Environmental Data</b>		
Temperature Range	-30°C to +70°C	
2011/65/EU(RoHS)	Compliant	

While the information has been carefully compiled to the best of our knowledge, nothing is intended as representation or warranty on our part and no statement herein shall be construed as recommendation to infringe existing patents. In the effort to improve our products, we reserve the right to make changes judged to be necessary.

Gwave Technology Inc.	
4th Floor, New Material Plaza, Yo	ngfeng Hi-Tech Base,Haidian
District, Beijing , China (100094)	www.gwave-tech.com

Tel.: +86 10 86484190 Fax: +86 10 86484190-0 email: gwave@gwave-tech.com