
## ADAPTOR DATASHEET



## Waveguide To Coax Adaptor

## WR22/2.4-UG-K-T

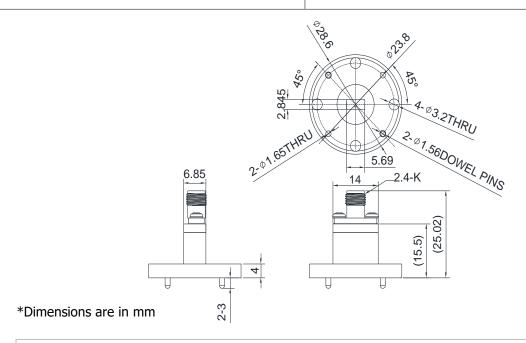

| Configuration                 |                        |
|-------------------------------|------------------------|
| Connector Type                | 2.4 Female             |
| Connector Impedance           | 50 Ohms                |
| Connector Polarity            | Standard               |
| Waveguide Type                | WR22                   |
| Flange                        | UG-383/U               |
| Adapter Body Style            | Straight               |
| Frequency Insertion Loss (dB) | 33 to 50 GHz<br>≤ 0.50 |
| VSWR /Return Loss             | 1.40                   |
| Materials Information         | · -                    |
| Body                          | Brass Gold Plated      |
| <b>Environmental Data</b>     |                        |
| Temperature Range             | -30°C to +70°C         |
| 2011/65/EU(RoHS)              | Compliant              |

While the information has been carefully compiled to the best of our knowledge, nothing is intended as representation or warranty on our part and no statement herein shall be construed as recommendation to infringe existing patents. In the effort to improve our products, we reserve the right to make changes judged to be necessary.

Gwave Technology Inc. 4<sup>th</sup> Floor,New Material Plaza,Yongfeng Hi-Tech Base,Haidian District,Beijing ,China(100094) www.gwave-tech.com Tel.: +86 10 86484190 Fax: +86 10 86484190-0 email: gwave@gwave-tech.com Page

1/1