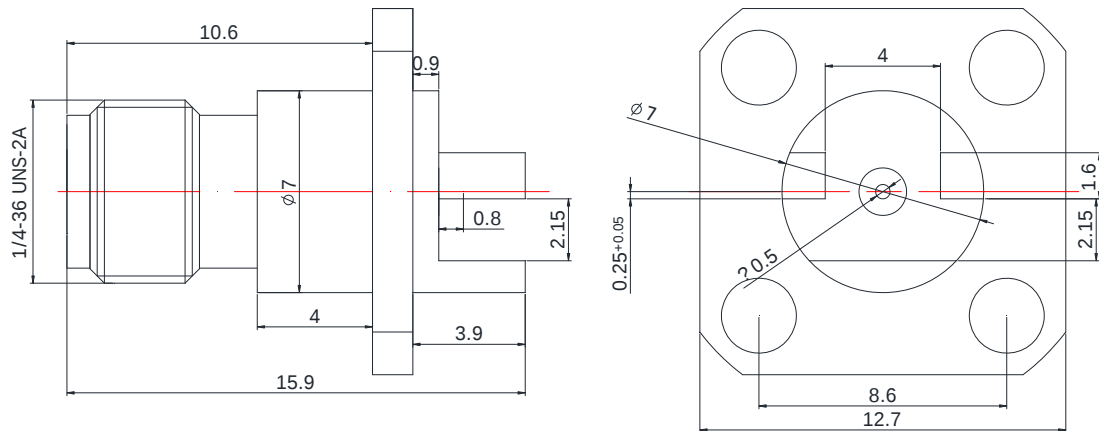


ADAPTOR DATA SHEET


**2.92MM(FEMALE) FOR PCB
WITH 4 HOLE FLANGE**
2.92-KFHD100

Electrical Specifications

Impedance	50 Ω
Frequency	DC to 40 GHz
Insertion Loss (dB)	$\leq 0.1 \times \text{Sqrt.}(f_GHz)$
Return loss/VSWR	$\geq 14\text{dB}$

Materials Information

Centre Contact	CuBe gold plated
Outer Contact	Brass gold plated
Body	Brass gold plated
Dielectric	PEEK

Environmental Data

Temperature range	-55°C to +165°C
2002/95/EC(RoHS)	Compliant

While the information has been carefully compiled to the best of our knowledge, nothing is intended as representation or warranty on our part and no statement herein shall be construed as recommendation to infringe existing patents. In the effort to improve our products, we reserve the right to make changes judged to be necessary.

Draft	Checker	Approved	Date	Rev.	ECN	Name	Date
LaiXX	Flex	Grisson	02.03.2018	a	-----	Lai	02.03.2018

Gwave Technology Inc.
4th Floor, New Material Plaza, Yongfeng Hi-Tech Base, Haidian
District, Beijing, China(100094) www.gwave-tech.com

Tel.: +86 10 58937305/06
Fax: +86 10 58937307
email: gwave@gwave-tech.com

Page
1 / 2