


# ELECTRICAL SPECIFICATIONS


FREQUENCY:	DC - 12.4 GHz
IMPEDANCE (NOM):	50 Ohms
VSWR (MAX):	
DC - 6.0 GHz:	1.15 : 1
6.0 - 12.4 GHz:	1.25 : 1
POWER (AVG):	5 WATTS
(Peak):	3,000 WATTS

# MECHANICAL SPECIFICATIONS

CONNECTOR:	STAINLESS STEEL, PASSIVATE
CONNECTOR NUT:	STAINLESS STEEL, PASSIVATE
CONTACT PIN:	BRASS, GOLD PLATE
HOUSING, HEAT SINK:	ALUMINUM, BLACK ANODIZE
INSULATOR:	PTFE, VIRGIN ELECTRICAL GRADE
WEIGHT:	12 GRAMS

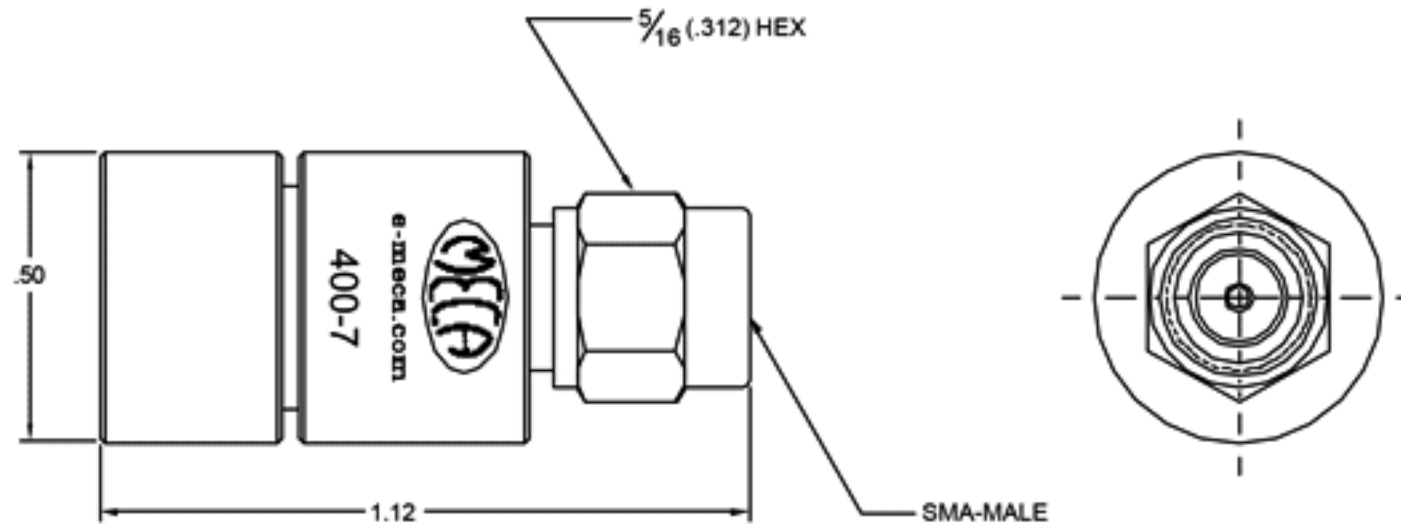

This document gives only a description of the product(s) and shall not form part of any contract. Please contact a MECA Applications Engineer for the most current specification drawing.

UNLESS OTHERWISE SPECIFIED, DIMENSIONS ARE IN INCHES			ELECTRONICS, INC. DENVER, NEW JERSEY e-meca.com	
TOLERANCES 2 PLACES: ±.02 3 PLACES: N/A ANGLES: N/A			TITLE TERMINATION, 50 Ohms, 5 WATTS, SMA-MALE CONNECTOR	
TIR: N/A		CODE IDENT. NO. 22424	DRAWING NO. 400-7	
SCALE: NTS				
SHEET: 1 OF 1				