


ELECTRICAL SPECIFICATIONS


| | |
|-------------------------------------|---|
| FREQUENCY RANGE (GHz): | Hz - 7.5 |
| IMPEDANCE (NOMINAL): | 50 Ohms |
| VSWR (MAX): | 1.10:1 |
| PASSIVE INTERMODULATION DISTORTION: | LESS THAN -160 dBc, -165 dBc TYPICAL |

MECHANICAL SPECIFICATIONS

| | |
|-------------------|-------------------------------|
| CONNECTORS: | BRASS, ALBALOY PLATE |
| CONNECTOR PINS: | BRASS, GOLD PLATE |
| INSULATORS: | PTFE, VIRGIN ELECTRICAL GRADE |
| TEMPERATURE: | -65°C TO +85°C |
| WEIGHT (NOMINAL): | 3.3 oz |

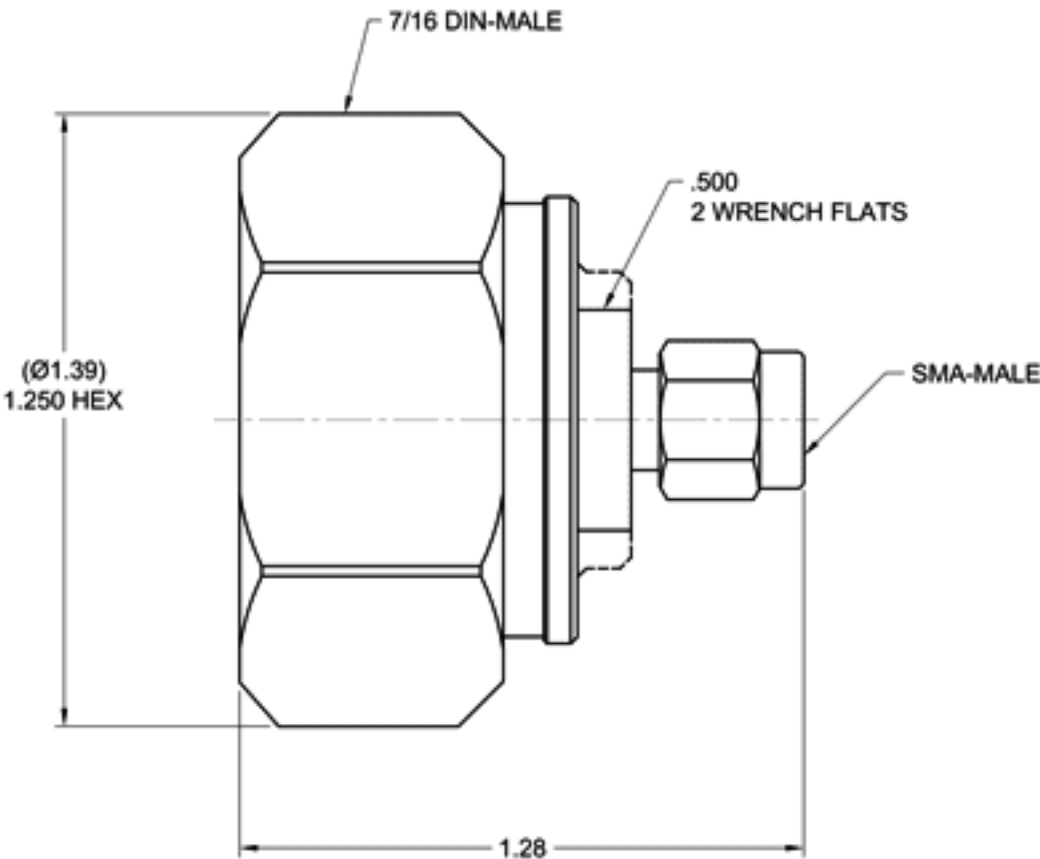

This document gives only a description of the product(s) and shall not form part of any contract.
Please contact a MECA Applications Engineer for the most current specification drawing.

| | | | | | | | |
|------------------------|-------|---|-----------|---|---|--|--|
| MATERIAL: SEE ABOVE | | UNLESS OTHERWISE SPECIFIED, DIMENSIONS ARE IN INCHES | |  | ELECTRONICS, INC. DENVILLE, NEW JERSEY e-MECA.com | | |
| FINISH: SEE ABOVE | | TOLERANCES 2 PLACES: ±.01 3 PLACES: .005 ANGLES: N/A | | | TITLE LOW PIM ADAPTER 7/16 DIN-MALE TO SMA-MALE | | |
| DRAWN: | DATE: | TIR: N/A | | | | | |
| APPROVED: | DATE: | SCALE: NTS | SIZE A | CAGE CODE NO. 22424 | DRAWING NO. ADM-SM | | |
| | | SHEET: 1 OF 1 | | | | | |

| | | | | | |
|-----|----|-------------|------|----|-----|
| LTR | PG | DESCRIPTION | DATE | DR | APP |
|-----|----|-------------|------|----|-----|