


SPECIFICATIONS


FREQUENCY RANGE (GHz): DC - 8 GHz
 IMPEDANCE (NOMINAL): 50 Ohms
 TEMPERATURE RANGE: -65°C TO +85°C
 VSWR: Hz - 1.0 1.05:1
 1.0 - 4.0 1.15:1
 4.0 - 8.0 1.25:1
 PIM: < -160 dBc

MFG CODE	DESCRIPTION
/M	N-MALE TO DIN-MALE ADAPTER

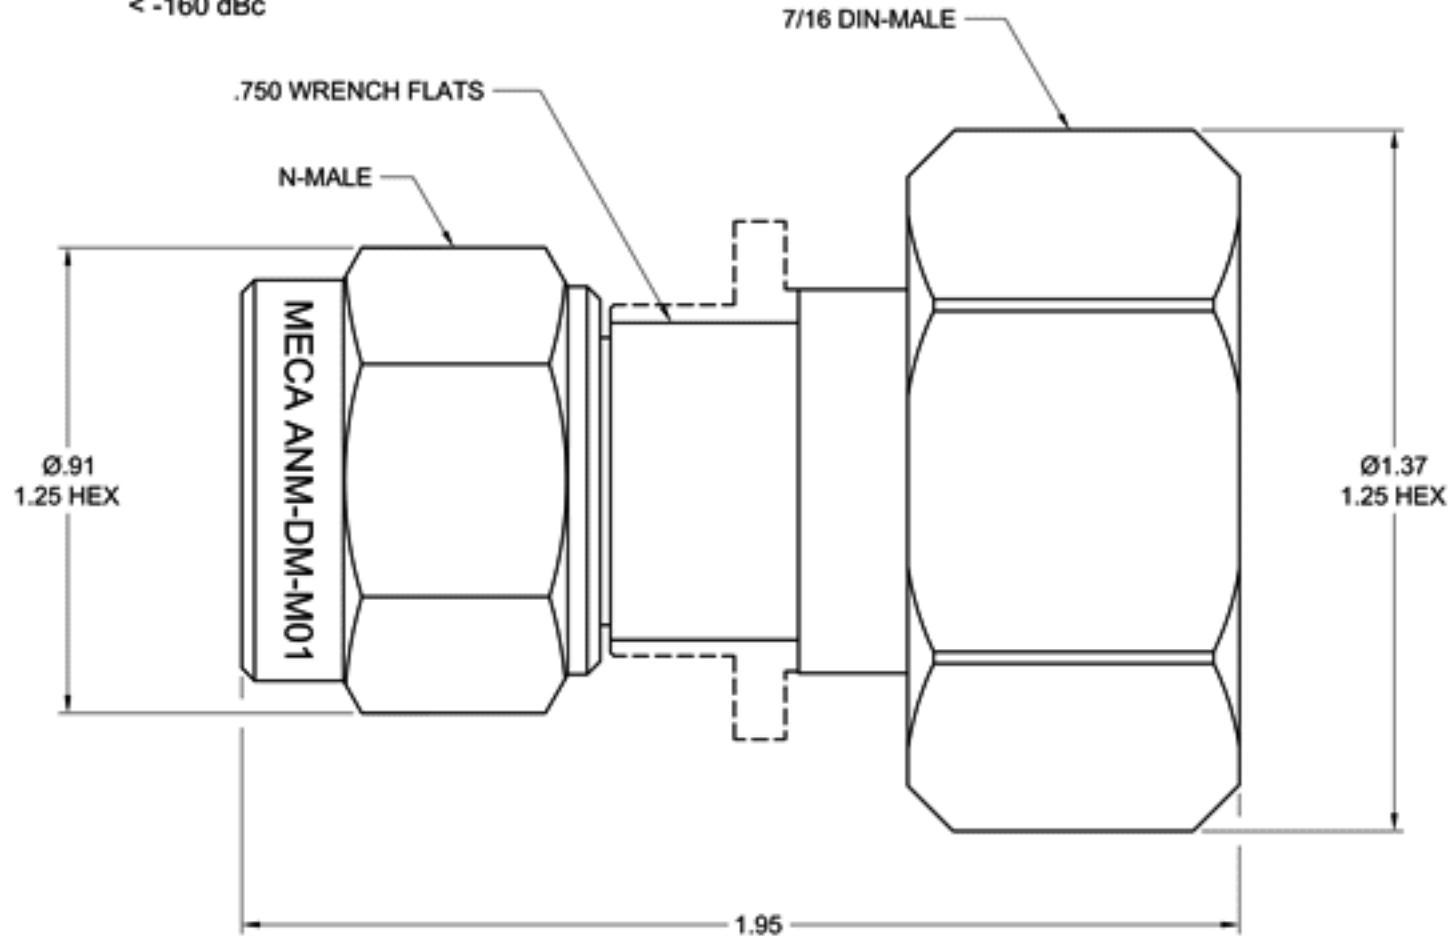

BODY: BRASS, ALBALOY PLATED
 CENTER CONTACT: BRASS, SILVER PLATED

This document gives only a description of the product(s) and shall not form part of any contract. Please contact a MECA Applications Engineer for the most current specification drawing.

MATERIAL: SEE ABOVE		TOP LEVEL ASSY: VARIOUS		 ELECTRONICS, INC. DENVER, NEW JERSEY e-MECA.com		
FINISH: SEE ABOVE		UNLESS OTHERWISE SPECIFIED, DIMENSIONS ARE IN INCHES				
DRAWN:		TOLERANCES N/A				
DATE:	TIR: N/A	TITLE ADAPTER, N-MALE TO DIN-MALE				
APPROVED:	SCALE: NTS	SIZE A	CAGE CODE NO. 22424	DRAWING NO. ANM-DM-M01		
DATE:	SHEET: 1 OF 1					
LTR	PG	DESCRIPTION	DATE	DR	APP	NEXT LEVEL ASSY.