


ELECTRICAL SPECIFICATIONS


FREQUENCY RANGE (GHz):	Hz - 11.0
IMPEDANCE (NOMINAL):	50 Ohms
VSWR (MAX):	
Hz - 2.0 GHz:	1.10:1
2.0 - 11.0 GHz:	1.30:1

MECHANICAL SPECIFICATIONS

CONNECTORS:	BRASS, NICKEL PLATE
CONNECTOR PINS:	BRASS, SILVER PLATE
INSULATORS:	PTFE, VIRGIN ELECTRICAL GRADE
TEMPERATURE:	-55°C TO +85°C

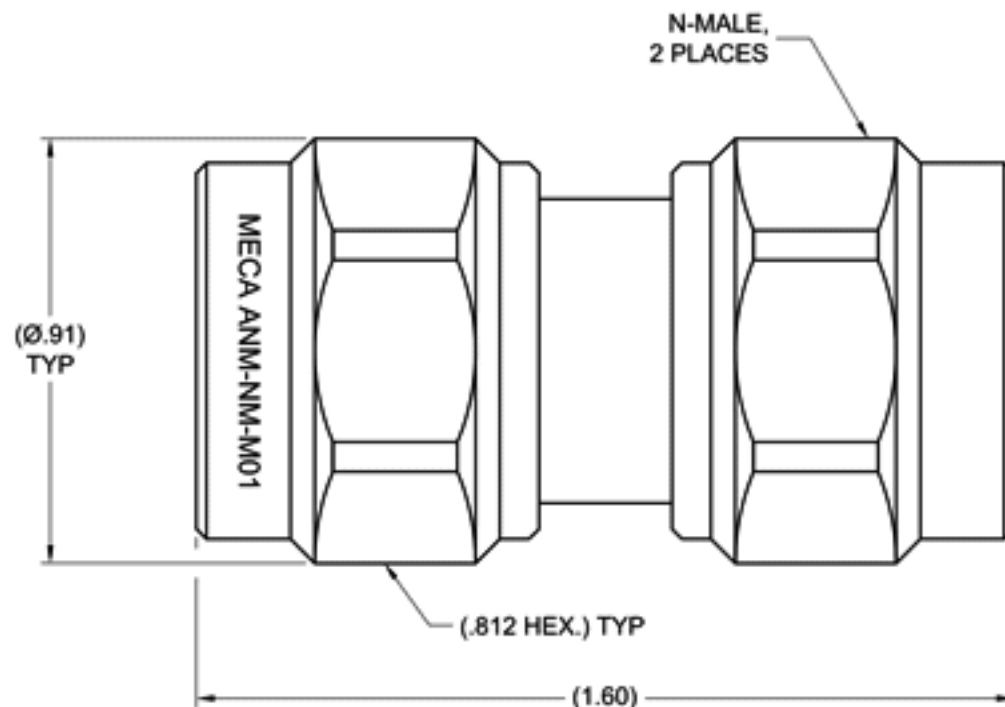

This document gives only a description of the product(s) and shall not form part of any contract. Please contact a MECA Applications Engineer for the most current specification drawing.

MATERIAL: SEE ABOVE		UNLESS OTHERWISE SPECIFIED, DIMENSIONS ARE IN INCHES			ELECTRONICS, INC. DENVER, NEW JERSEY e-MECA.com	
FINISH: SEE ABOVE		TOLERANCES 2 PLACES: N/A 3 PLACES: N/A ANGLES: N/A			TITLE ADAPTER, N-MALE TO N-MALE	
DRAWN:	DATE:	TIR: N/A		CAGE CODE NO. 22424	DRAWING NO. ANM-NM-M01	
APPROVED:	DATE:	SCALE: NTS	SIZE A			
LTR	PG	DESCRIPTION	DATE	DR	APP	SHEET: 1 OF 1