


ELECTRICAL SPECIFICATIONS

FREQUENCY RANGE (GHz):	Hz - 11.0
IMPEDANCE (NOMINAL):	50 Ohms
VSWR (MAX):	
Hz - 2.0 GHz:	1.10:1
2.0 - 6.0 GHz:	1.20:1
6.0 - 10.0 GHz:	TBD
10.0 - 11.0 GHz:	TBD
PASSIVE INTERMODULATION DISTORTION:	LESS THAN -155 dBc, -165 dBc TYPICAL

MECHANICAL SPECIFICATIONS

CONNECTORS:	BRASS, ALBALOY PLATE
CONNECTOR PINS:	BRASS, GOLD PLATE
INSULATORS:	PTFE, VIRGIN ELECTRICAL GRADE
TEMPERATURE:	-65°C TO +85°C
WEIGHT:	5.0 oz

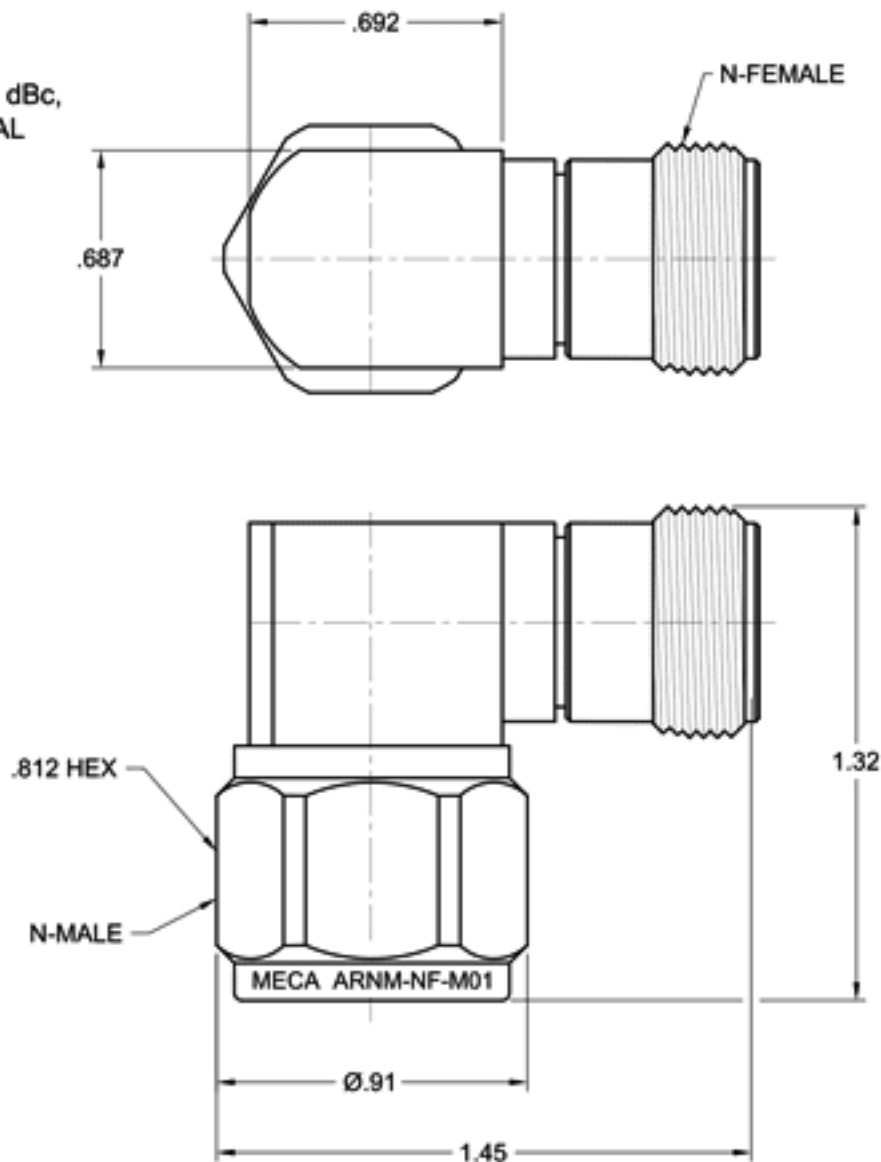

This document gives only a description of the product(s) and shall not form part of any contract. Please contact a MECA Applications Engineer for the most current specification drawing.

MATERIAL: SEE ABOVE		UNLESS OTHERWISE SPECIFIED, DIMENSIONS ARE IN INCHES	
FINISH: SEE ABOVE		TOLERANCES 2 PLACES: ±.01 3 PLACES: ±.005 ANGLES: ±1/2°	
DRAWN:	DATE:	TIR: N/A	
APPROVED:	DATE:	SCALE: NTS	SIZE
		SHEET: 1 OF 1	A



ELECTRONICS, INC.
DENVER, NEW JERSEY
e-MECA.com

TITLE
LOW PIM ADAPTER, RIGHT ANGLE,
N-MALE TO N-FEMALE

CAGE CODE NO.
22424

DRAWING NO.
ARNM-NF-M01

LTR	PG	DESCRIPTION	DATE	DR	APP
-----	----	-------------	------	----	-----