


ELECTRICAL SPECIFICATIONS

FREQUENCY RANGE (GHz):	0.700-0.800
IMPEDANCE:	50 OHMS
VSWR:	1.30:1 MAX
INSERTION LOSS (dB):	0.50 MAX
ISOLATION (dB):	20 TYP/17 MIN
POWER: AVG:	250 W
PEAK:	2 kW

MECHANICAL SPECIFICATIONS

CONNECTORS:	N-FEMALE, BRASS, NICKEL PLATE
CONTACT PINS:	BERYLLIUM COPPER, GOLD PLATE
OPERATING TEMPERATURE:	-20°C TO +65°C
WEIGHT (APPROX):	6.0 oz

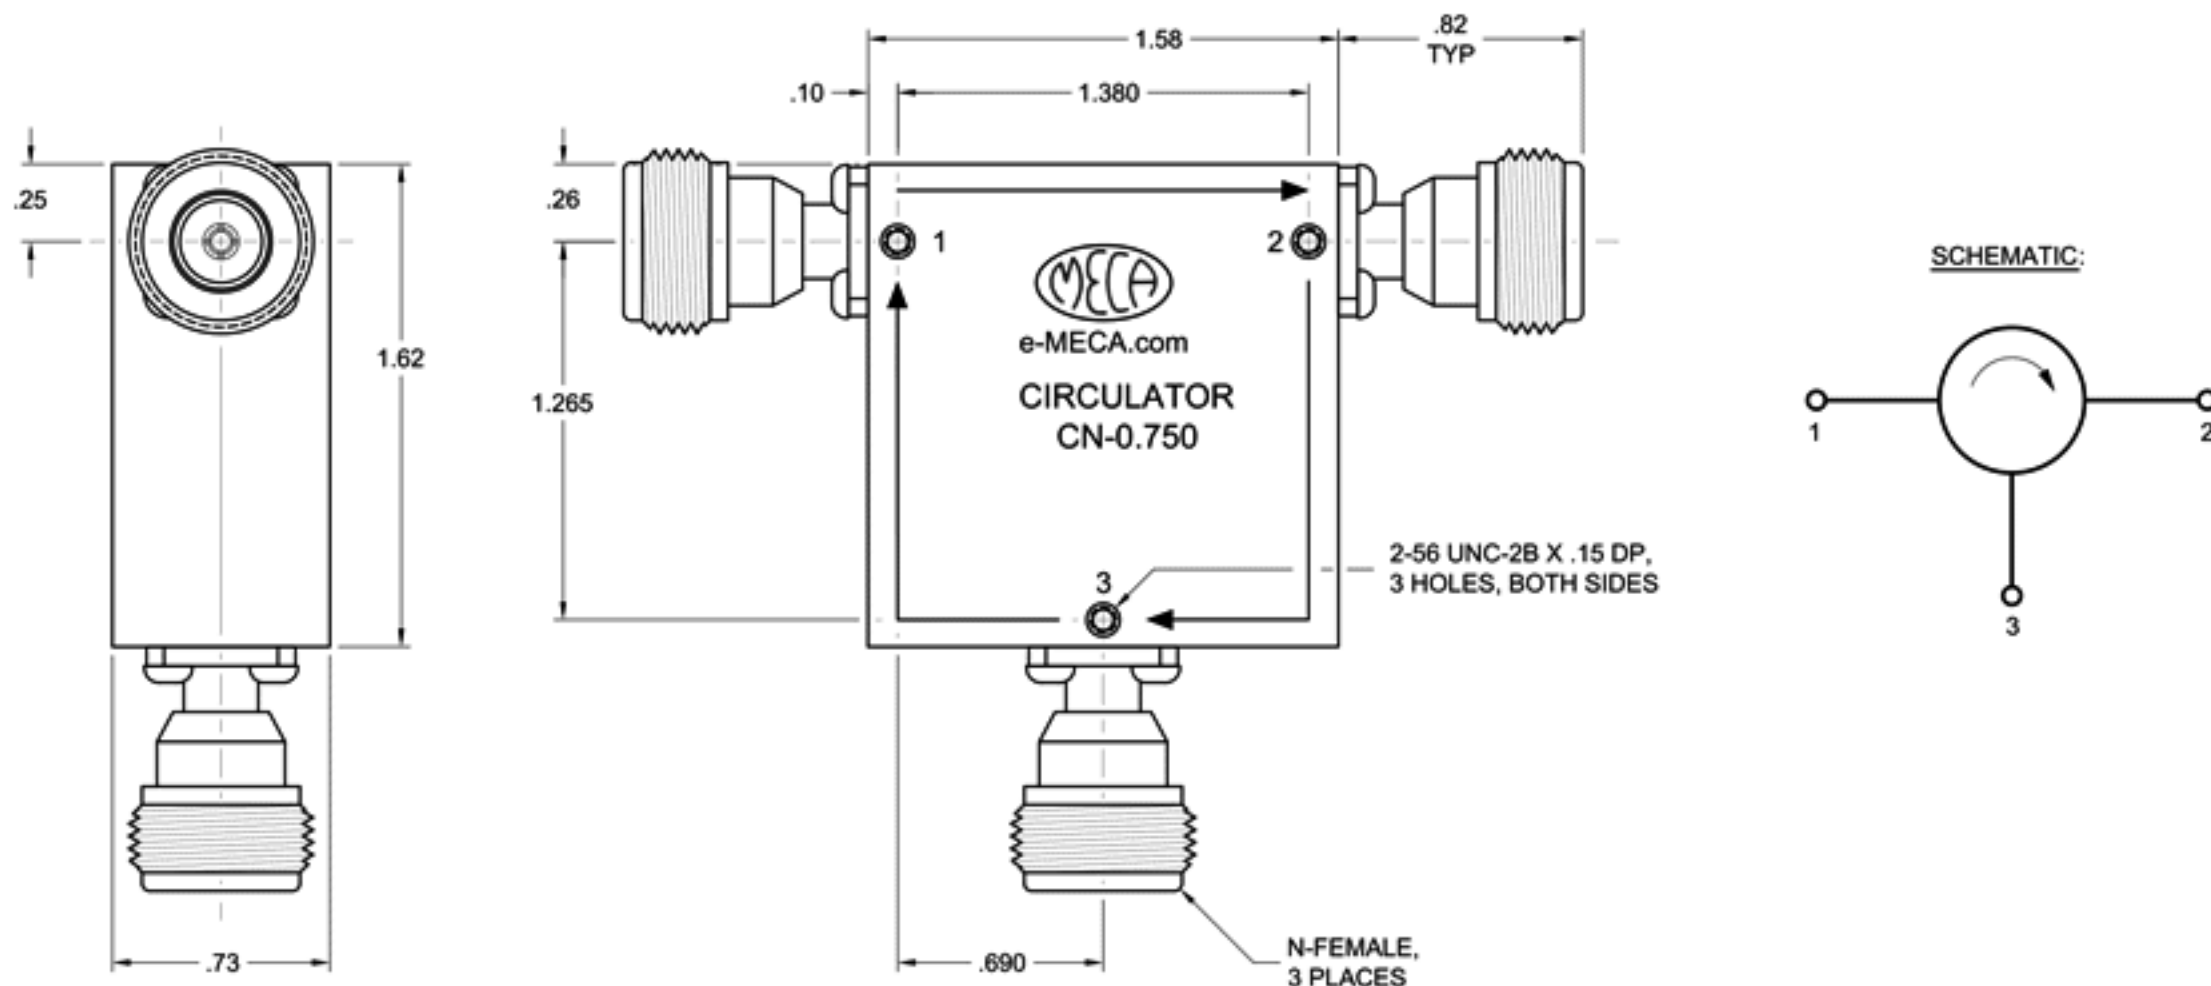

This document gives only a description of the product(s) and shall not form part of any contract. Please contact a MECA Applications Engineer for the most current specification drawing.

MATERIAL: SEE ABOVE		UNLESS OTHERWISE SPECIFIED, DIMENSIONS ARE IN INCHES			ELECTRONICS, INC. DENVER, NEW JERSEY e-meca.com	
FINISH: SEE ABOVE		TOLERANCES 2 PLACES: ±.03 3 PLACES: ±.010 ANGLES: N/A			TITLE CIRCULATOR, 0.700 - 0.800 GHz, N-FEMALE	
DRAWN:	DATE:	TIR: N/A		CODE IDENT. NO. 22424	DRAWING NO. CN-0.750	
APPROVED:	DATE:	SCALE: NTS	SIZE A			
		SHEET: 1 OF 1				