


MODEL No:

G3PO-J2MD

NOTE:Information herein is believed by Gwave to be accurate.However,Gwave assumes no responsibility for any omissions or errors inaccuracies for its use or for any infringements of patents or other rights of third parties that may result from its use.Data is intended for informational purpose only and does not constitute a contract of sale or any express or implied warranty,including any warranty of merchat ability or fitness for a particular purpose.

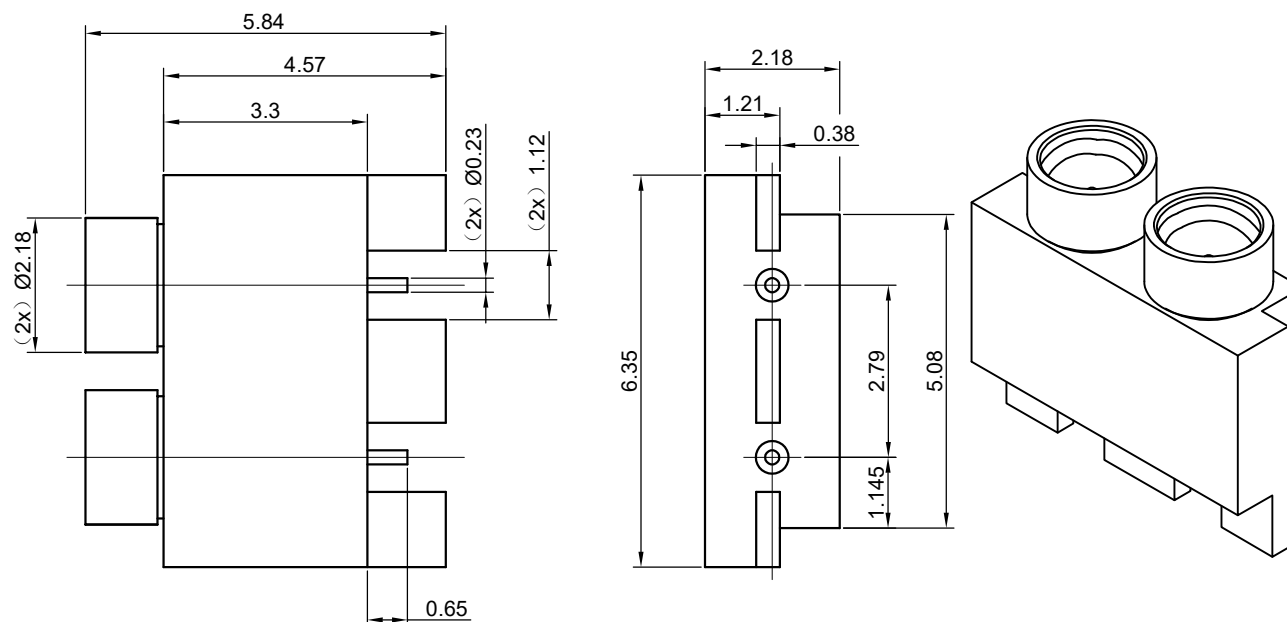

ELECTRICAL SPECIFICATIONS

Frequency:DC to 65 GHz

Return Loss:15dB to 65 GHz

MATERIALS INFORMATION

Centre Contact:CuBe Gold Plated

Outer Contact:Brass Gold Plated

Dielectric:PTFE

1.ALL DIMENSIONS ARE IN MM.AII ANGLES ARE IN DEGREES.
2.TEMPERATURE RANGE:-40°C to +85°C.
3.RoHS:COMPLIANT.
NOTES:UNLESS OTHERWISE SPECIFIED.

REV	A	DEGN:		APRVD:	
Gwave					
Technical Confirmation Form					

TITLE:		G3PO-J2MD CONNECTOR	
SHEET:1 OF 1	Customer Confirmation:		