


3506 SERIES, FLEXIBLE CABLE,
1.85MM(FEMALE)- GPPO(MINI-SMP)(FEMALE)

GAU2-185FFGPPF-XXX

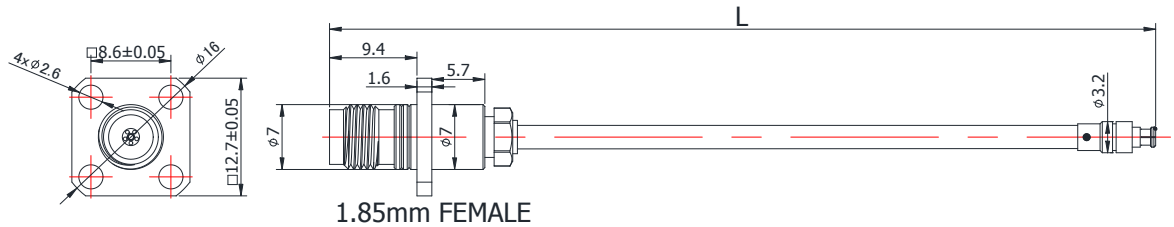

* Label and Shrinking tube design depend on customer's request.

Configuration

Connector 1 Type	1.85mm Female
Connector 1 Body Style	Straight
Body Material and Plating	Passivated Staindless Steel
Connector 1 Mount Method	4 Hole Flange
Connector 2 Type	GPPO(Mini-SMP) Female
Connector 2 Body Style	Straight
Body Material and Plating	CuBe Gold Plated
Connector 2 Mount Method	None
Cable Type	3506 Series

Electrical Specifications

Impedance	50 Ω
Frequency	DC to 67 GHz
Return Loss/VSWR	10dB to 67 GHz
Shielding Effectiveness	<-100dB @ 1GHz
Phase Matching	On Request
Signal Delay	On Request
Power Handling	90watt @ 2GHz at sea level,VSWR1.0

Environmental Data

Temperature Range	-40°C to +165°C
RoHS	Compliant

Cable Specifications

Center Conductor	Silver plated copper
Dielectric	ePTFE
Jacket	FEP
Capacitance(pF/m)	94
Velocity of propagation(%)	82
Min. bending radius(mm)	6
Jacket Diameter(mm)	2.2

Part Number List

Part Number	Length [mm]	Insertion Loss ≤(dB)				
		10GHz	18GHz	26.5GHz	40GHz	67GHz
GAU2-185FFGPPF-1500	1500±15	3.97	5.13	6.13	7.48	9.73
GAU2-185FFGPPF-1000	1000±10	2.92	3.69	4.36	5.26	6.76
GAU2-185FFGPPF-500	500±10	1.87	2.26	2.59	3.04	3.79
GAU2-185FFGPPF-200	200±5	1.24	1.40	1.53	1.71	2.01
GAU2-185FFGPPF-100	100±5	1.03	1.11	1.18	1.27	1.42

While the information has been carefully compiled to the best of our knowledge, nothing is intended as representation or warranty or our part and no statement herein shall be construed as recommendation to infringe existing patents. In the effort to improve our products, we reserve the right to make changes judged to be necessary.