

Circulator

Gwave®

50Ω N(F) Circulator (222M ~236M)

GCDN-229M-7M


Electrical Specifications

Frequency Range, MHz	222~236
Impedance, Ohms	50
Insertion Loss Max.[dB]	1-2/3-4≤0.8 dB 2-3/4-1≤0.45 dB
Input VSWR Max.	1.2
Isolation Min.[dB]	2-1/4-3≥ 45 dB 3-2/1-4≥ 45 dB
CW Power Max.[W]	25W

Mechanical Specifications

Conn.Type	N(F)
Operating Range deg.[C]	0~ +60

Outline Drawing

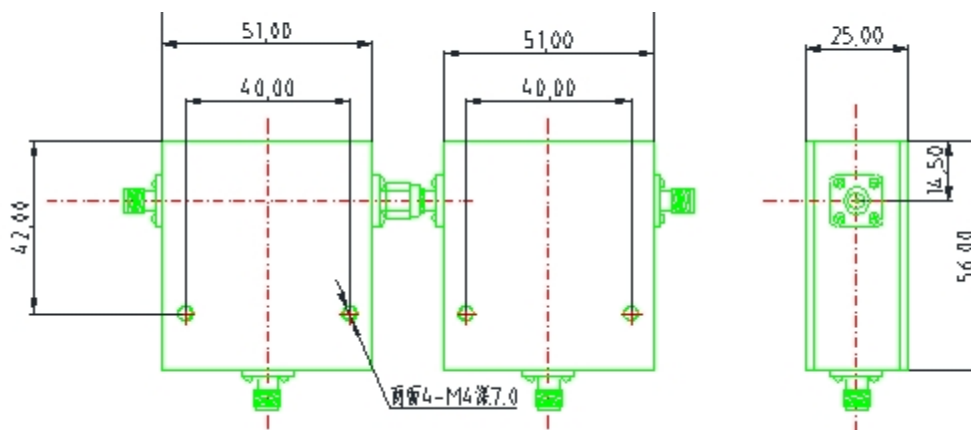

Notes