

Circulator

Gwave

50Ω SMA(F) Circulator (4~8GHz)

GCIR4G8G-10W-SMF


Electrical Specifications

Frequency Range (GHz)	4 ~ 8
Impedance, Ohms	50
Insertion Loss Max.[dB]	0.4
VSWR Max.	1.3
Isolation Min.[dB]	18
CW Power Max.[W]	10
Transmission Direction	Clockwise

Mechanical Specifications

Connector Type	SMA-Female
Weight	33g
Operating Temperature	-30°C~70°C
Body Material	Aluminum
External Body Material	Nickel plated iron

Outline Drawing

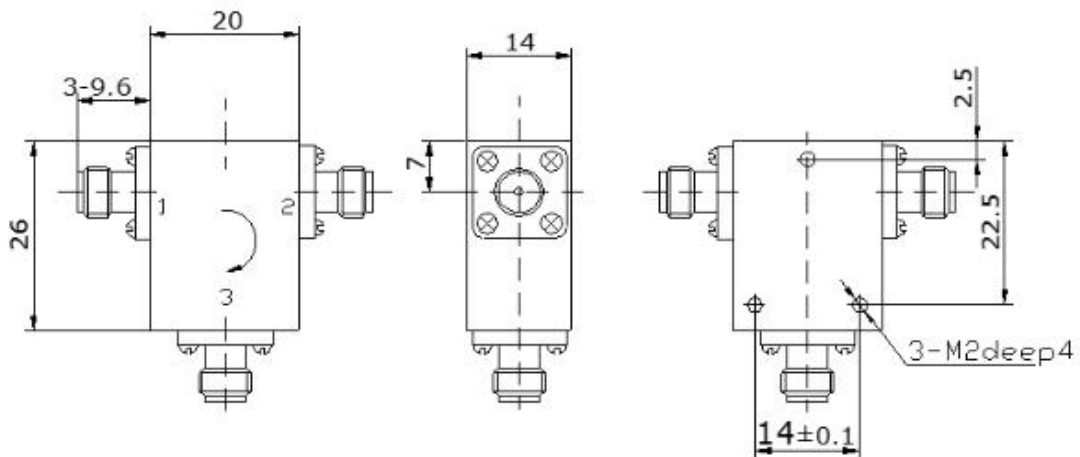

Dimensions are in mm

Circulator

Gwave

50Ω SMA(F) Circulator (4~8GHz)

GCIR4G8G-10W-SMF

Test Report

