


Electrical Specifications

Impedance:	50Ω
Frequency Range:	10MHz ~ 67GHz
Insertion Loss:	≤0.9dB
VSWR:	≤1.5
Voltage:	≤50 V

Mechanical Specifications

Temperature Range[°C]:	-55~+100
Body:	Stainless Steel
Center Conductor:	CuBe Gold Plated
Dielectric:	PEI
Connector Type:	1.85mm

Outline Drawing

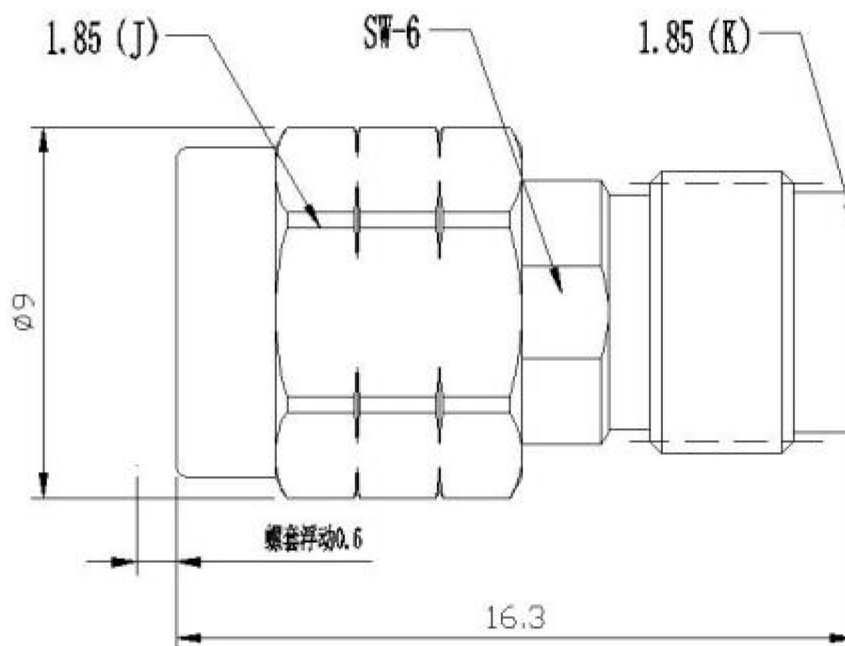

*Dimensions are in mm