

Isolator

Gwave

50Ω SMA Isolator(2~4GHz)

GIS-020040-SMF


Electrical Specifications

Frequency Range [GHz]	2~ 4
Impedance, Ohms	50
Insertion Loss Max [dB]	0.6
Input VSWR Max.	1.35
Isolation Min [dB]	18
Forward Power Rating [W]	20 (CW)
Reverse Power [W]	10

Mechanical Specifications

Connector Type	SMA-Female (Brass Gold plated)
Weight Max [g]	81
Operating Range deg [C]	0~60
Body material	Aluminum oxidation
Direction	Clockwise:1→2

Outline Drawing

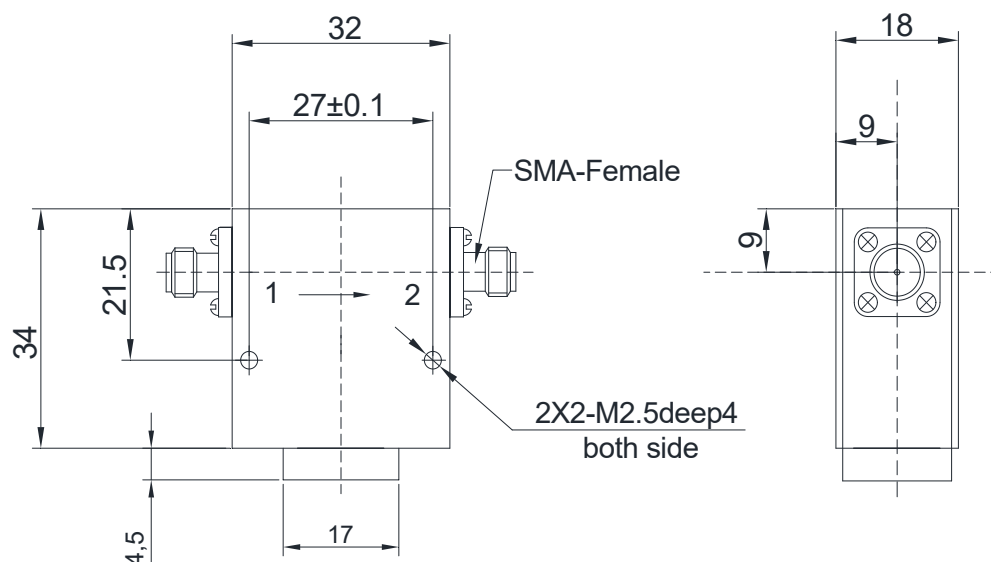

Isolator



50Ω SMA Isolator(2~4GHz)

GIS-020040-SMF

