

Low Pass Filter



SMA low Pass Filter ,DC-4GHz

GLPF4000M-SMF


Electrical Specifications

Center Frequency, GHz	DC-4
Impedance, Ohms	50
VSWR Max.	1.3
Insertion Loss,dB	≤ 1dB@DC~3.8GHz ≤ 1.5dB@3.8~4GHz
Rejection	≥ 60dB@4.5~12.3GHz
CW Power(W)	≤ 15W

Mechanical Specifications

Conn.Type	SMA(F)
Operating Range deg.[C]	-55 ~ +85

Outline Drawing

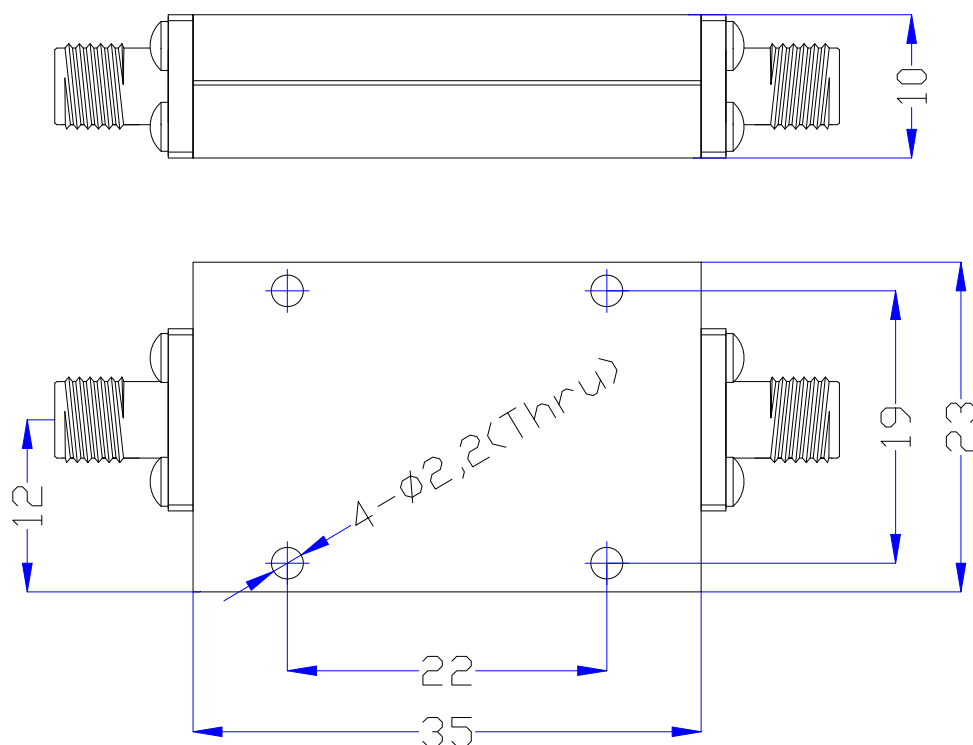

Notes