

Probe DATASHEET

Gwave

GSG 50Ω, 1.0mm Connector,
DC-110GHz,100μm

GPB110-GSG-100


Electrical Specifications

Frequency Range (GHz)	DC ~ 110
Impedance (Ω)	50
Insertion Loss (dB)	<1.3
Return Loss (dB)	>12
Tip Configuration	GSG
Pitch (μm)	100
Tip Width (μm)	30
Overtravel (μm)	20-60
Skating Distance (μm)	10-30

Mechanical Specifications

Connector Type	1.0mm Female
Operating Temperature	-40°C~+175°C
Tip Material	Nickel Alloy

Outline Drawing

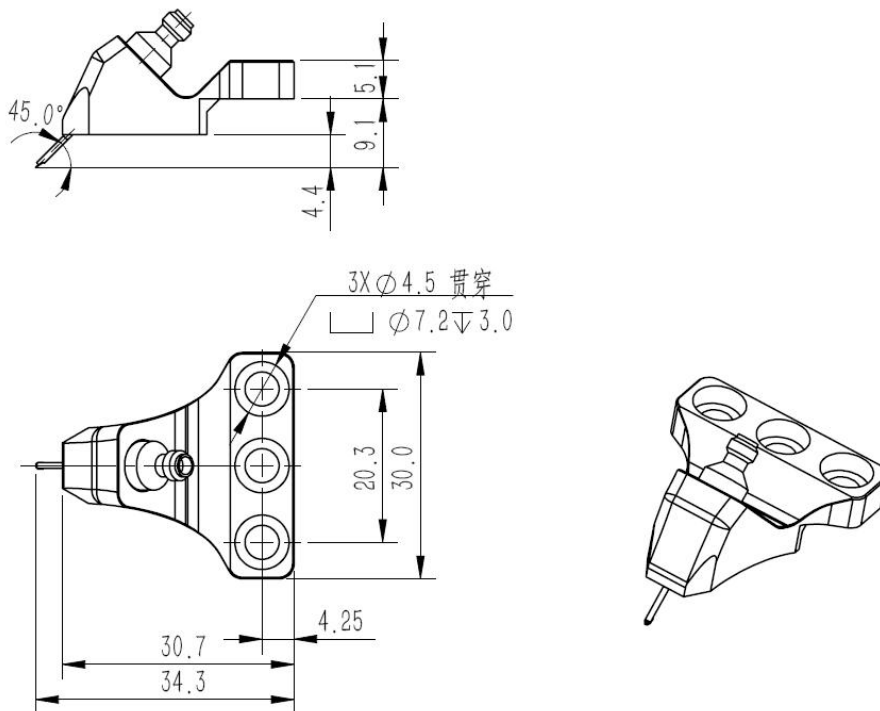

Dimensions are in mm

Probe DATASHEET




GSG 50Ω, 1.0mm Connector,
DC-110GHz,100μm

GPB110-GSG-100


Test data

S11 FORWARD REFLECTION

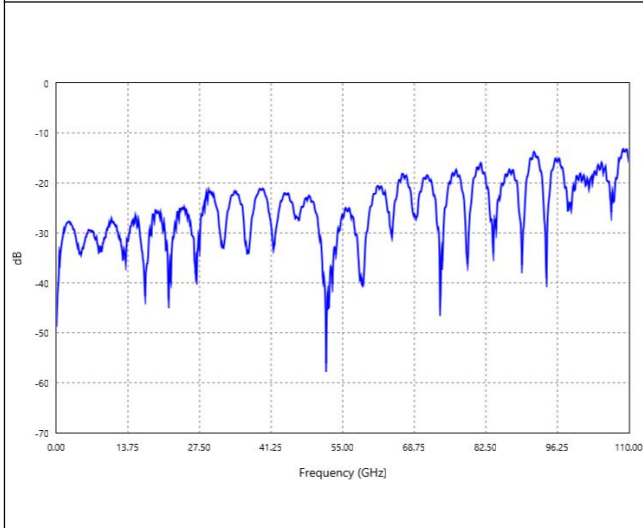

Minimum return loss for this probe is -13.21dB

S21 FORWARD TRANSMISSION

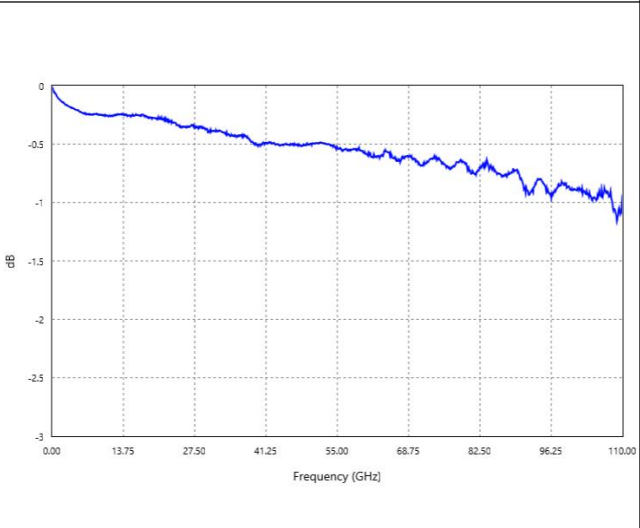

Maximum insertion loss for this probe is -1.15dB