

Probe DATASHEET



GSG 50Ω, SMA Connector,
DC-26GHz,150μm

GPB26-GSG-150


Electrical Specifications

Frequency Range (GHz)	DC ~ 26
Impedance (Ω)	50
Insertion Loss (dB)	<0.6
Return Loss (dB)	>16
Tip Configuration	GSG
Pitch (μm)	150
Tip Width (μm)	30
Overtravel (μm)	20-60
Skating Distance (μm)	10-30

Mechanical Specifications

Connector Type	SMA Female
Operating Temperature	-40°C~+175°C
Tip Material	Nickel Alloy

Outline Drawing

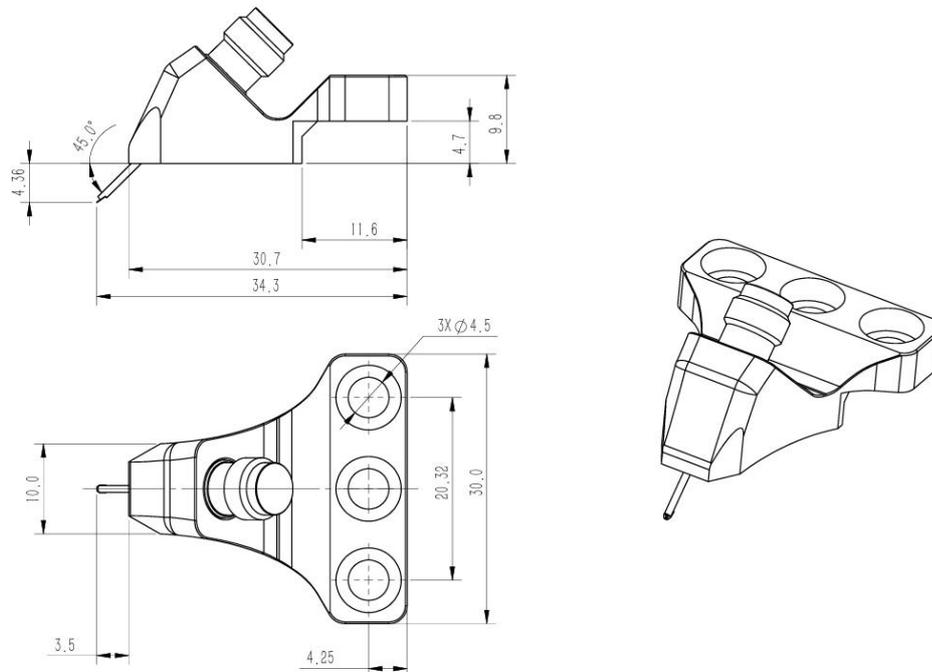

Dimensions are in mm

Probe DATASHEET




GSG 50Ω, SMA Connector,
DC-26GHz,150μm

GPB26-GSG-150


Test data

S11 FORWARD REFLECTION

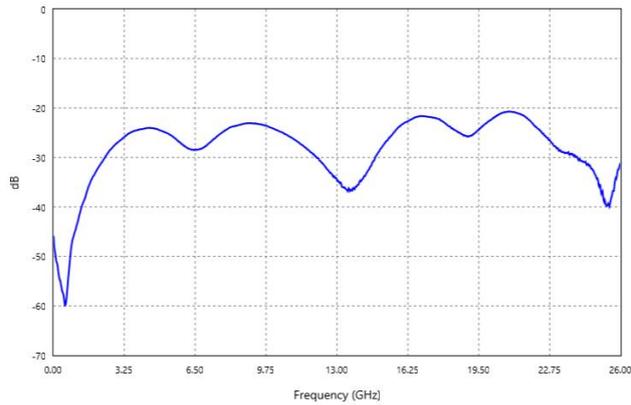

Minimum return loss for this probe is -20.70dB

S21 FORWARD TRANSMISSION

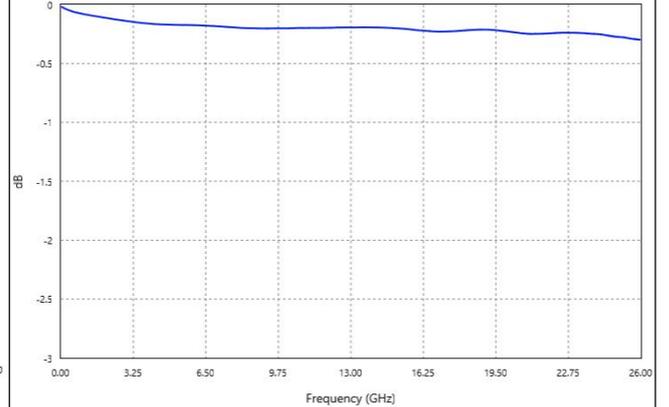

Maximum insertion loss for this probe is -0.30dB