

Probe DATASHEET



GSSG 100Ω, SMA Connector,
DC-26.5GHz,150μm

GPB26-GSSG-150




Electrical Specifications

Frequency Range (GHz)	DC ~ 26.5
Impedance (Ω)	100
Insertion Loss (dB)	<0.7
Return Loss (dB)	>16
Tip Configuration	GSSG
Pitch (μm)	150
Tip Width (μm)	30
Overtravel (μm)	20-60
Skating Distance (μm)	10-30

Mechanical Specifications

Connector Type	SMA Female
Operating Temperature	-40°C~+175°C
Tip Material	Nickel Alloy

Outline Drawing

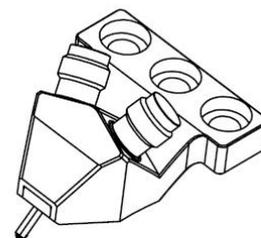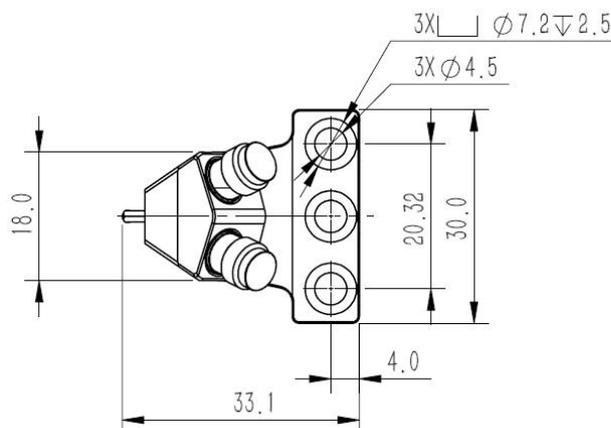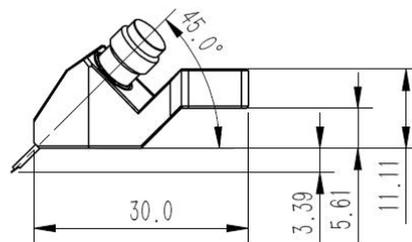

Dimensions are in mm

Probe DATASHEET




GSSG 100Ω, SMA Connector,
DC-26.5GHz,150μm

GPB26-GSSG-150


Test data

Sdd11 FORWARD REFLECTION

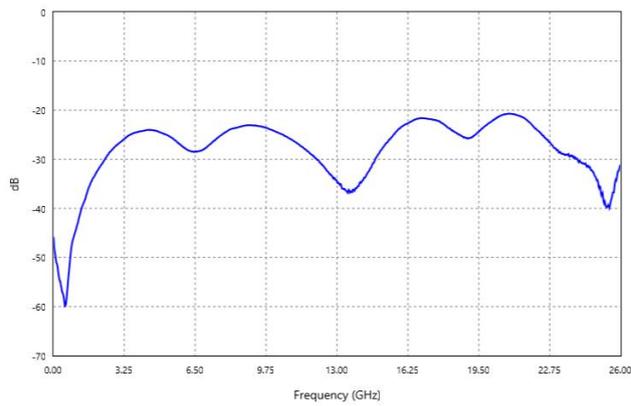

Minimum return loss for this probe is -20.70dB

Sdd21 FORWARD TRANSMISSION

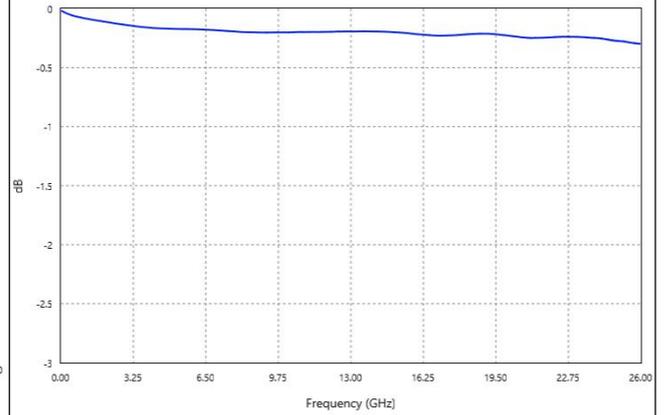

Maximum insertion loss for this probe is -0.30dB