


Electrical Specifications

Frequency Range, [MHz]	100 ~ 500
Insertion Loss [dB]	≤ 0.8(Excluding theoretical loss 3.0dB)
Input Port VSWR	≤1.20
Output Port VSWR	≤1.20
Isolation [dB]	Typ.26dB / Min.20dB
Amplitude Balance[dB]	±0.2
Phase Balance	±2°
Impedance, Ohms:	50
Power Rating.[W]	Splitter 分路器用时 30W; Combiner 合路器用时 2W

Mechanical Specifications

Conn.Type	SMA(Female)
Weight Max[g]	120
Operating Range deg.[°C]	-45~+85
Surface Finishing	Black paint 黑色烤漆

Outline Drawing

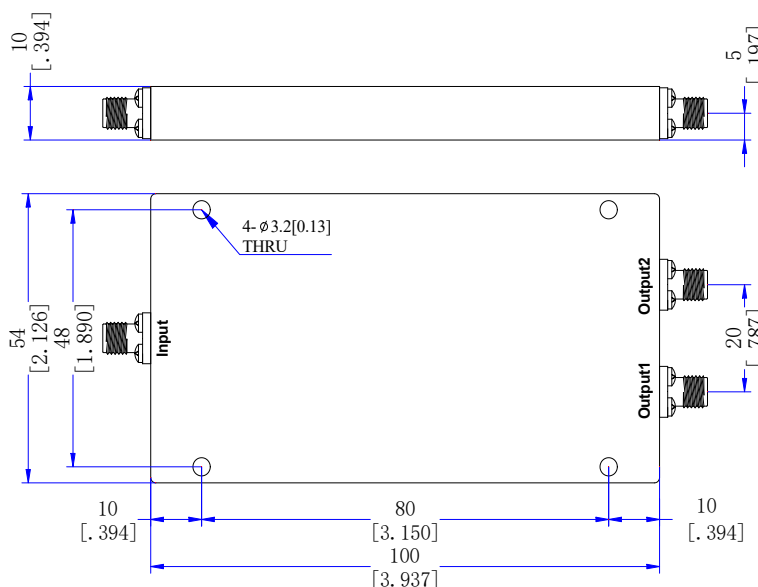

Notes