


## Electrical Specifications

|                         |           |
|-------------------------|-----------|
| Frequency Range, GHz    | DC ~ 26.5 |
| Impedance, Ohms         | 50        |
| Insertion Loss Max.[dB] | 7.5       |
| Amp.Bal. Max.[dB]       | ±0.4      |
| VSWR Input Max.         | 1.50      |
| VSWR Output Max.        | 2.50      |
| Isolation Min.[dB]      | 8         |
| Phase Bal. Max.[Deg.]   | ±3        |
| Power Rating .[W]       | 2         |

## Mechanical Specifications

|                         |          |
|-------------------------|----------|
| Conn.Type               | SMA(F)   |
| Operating Range deg.[C] | -32 ~ 85 |

## Outline Drawing

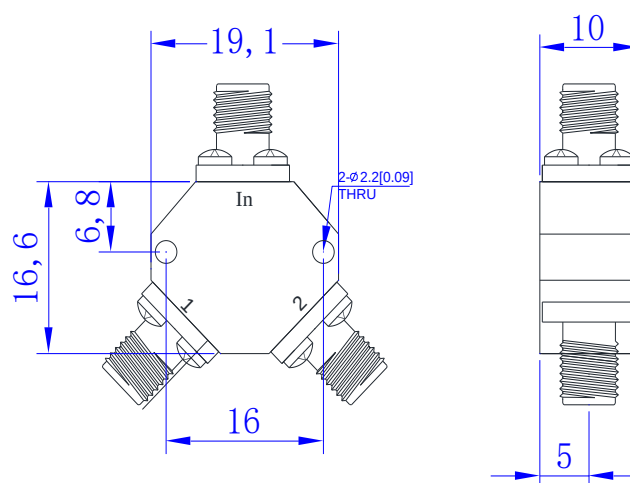

- \*1.Dimensions are in mm [inches]  
 2.Tolerances: Outline drawing:±0.3

## Notes

-Compliant MIL-STD-810G environment test standard.