


Electrical Specifications

Frequency Range, GHz	DC ~ 50
Impedance, Ohms	50
Insertion Loss Max.[dB]	7.8
Amp.Bal. Max.[dB]	±0.8
VSWR Input Max.	1.50
VSWR Output Max.	2.50
Isolation Min.[dB]	9
Phase Bal. Max.[Deg.]	±8
Power Rating.[W]	1

Mechanical Specifications

Conn.Type	2.4mm(F)
Weight Max[g]	40
Operating Range deg.[C]	-35 ~ 75

Outline Drawing

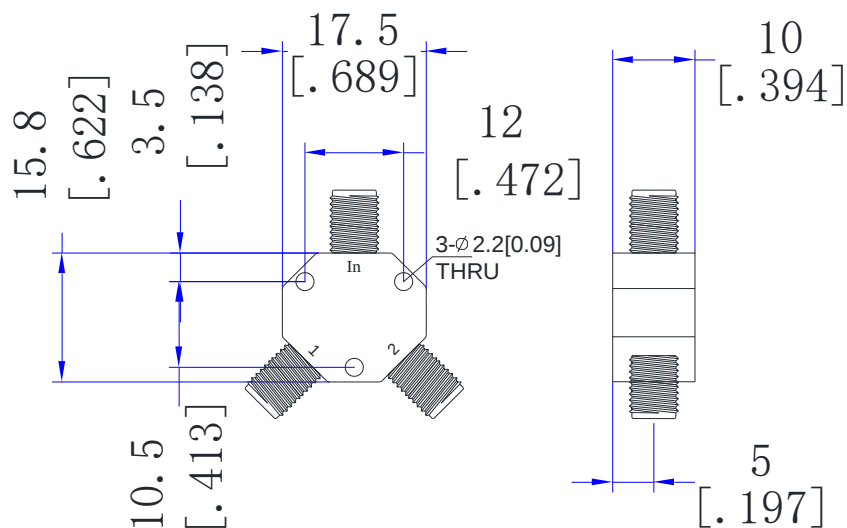

- *1.Dimensions are in mm [inches]
 2.Tolerances: Outline drawing:±0.3

Notes

-Compliant MIL-STD-810G environment test standard.