


Electrical Specifications

Frequency Range, GHz	26.5 ~ 67
Impedance, Ohms	50
Insertion Loss Max.[dB]	2.1
Amp.Bal. Max.[dB]	±0.6
Input VSWR Max.	1.8
Output VSWR Max.	1.8
Isolation Min.[dB]	18
Phase Bal. Max.[Deg.]	±8
CW Power Max.[W]	12
Peak Power Max.[kW]	1

Mechanical Specifications

Conn.Type	1.85mm(F)
Weight Max[g]	25
Operating Range deg.[C]	-55 ~ 85

Outline Drawing

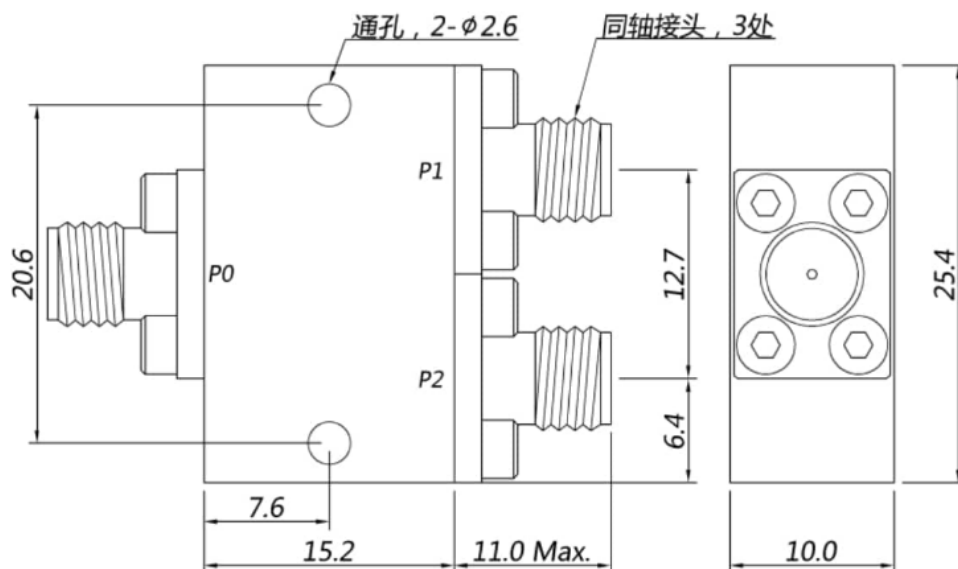

Notes

- Insert loss does not include theoretical power distribution insert loss[3dB].
- Compliant MIL-STD-810G environment test standard.