


Electrical Specifications

Frequency Range, GHz	2 ~ 18
Impedance, Ohms	50
Insertion Loss Max.[dB]	1.6
Amp.Bal. Max.[dB]	±0.4
Input VSWR Max.	1.5
Output VSWR Max.	1.4
Isolation Min.[dB]	18
Phase Bal. Max.[Deg.]	±6
CW Power Max.[W]	20

Mechanical Specifications

Conn.Type	SMA(F)
Weight Max[g]	80
Operating Range deg.[C]	-45 ~ 85

Outline Drawing

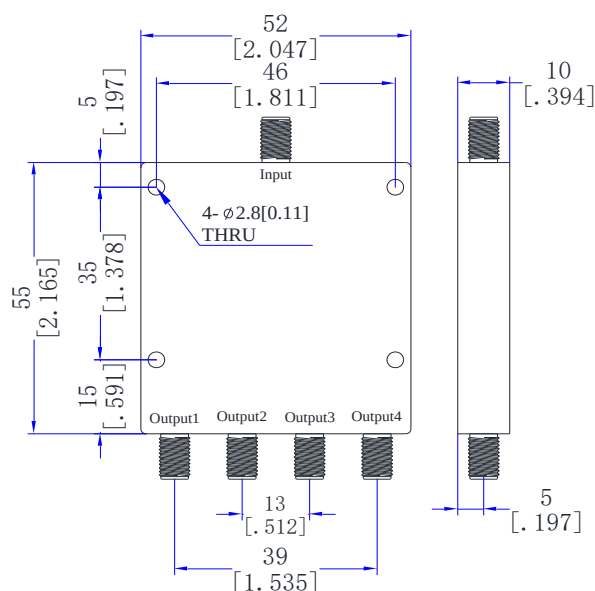

Notes

- Insert loss does not include theoretical power distribution insert loss[6dB].
- Compliant MIL-STD-810G environment test standard.