

Power Divider



50Ω 8 Way SMA Power Divider(0.01 ~ 1G)

GPD-8-10M1000M-E


Electrical Specifications

Frequency Range, MHz	10~ 1000
Impedance, Ohms	50
Insertion Loss Max.[dB]	3.0
Amp.Bal. Max.[dB]	±0.5
Input VSWR Max.	1.30
Output VSWR Max.	1.30
Isolation Min.[dB]	18
Phase Bal. Max.[Deg.]	±5
CW Power Max.[W]	1

Mechanical Specifications

Conn.Type	SMA(F)
Weight Max[g]	260
Operating Range deg.[C]	-35 ~ 75
Color	Black

Outline Drawing

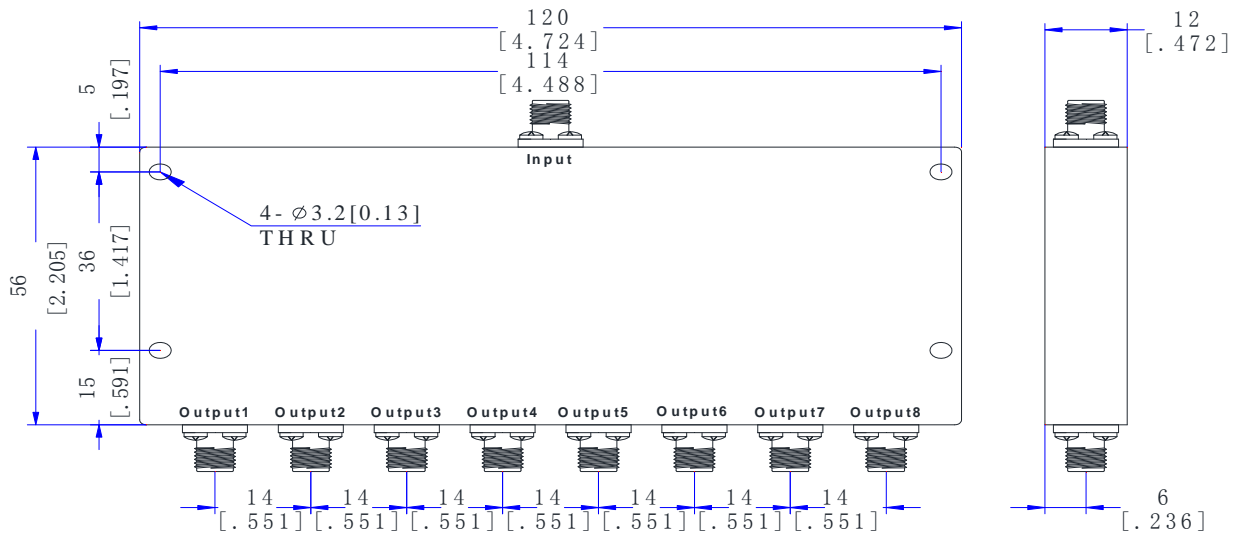

Notes

- Insert loss does not include theoretical power distribution insert loss[9dB].
- Compliant MIL-STD-810G environment test standard.