


CABLE DATA SHEET

Gwave®

SEMI-FLEX CABLE

GUT-047-FORM-FEP

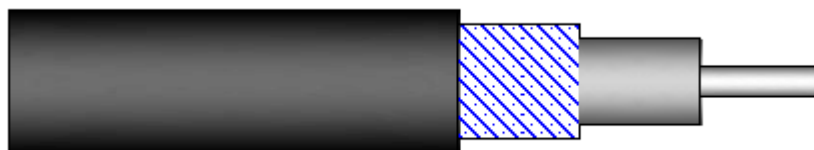

结构参数 Construction and Parameter

	材料 Material	直径 Diameter (mm)
内导体 Center Conductor	镀银铜包钢 Silver plated copperweld	0.29±0.0127
绝缘体 Dielectric	实心 PTFE Solid PTFE	0.94±0.0254
外导体 Outer Conductor	浸锡铜线 Tin-soaked copper Coverge100%	1.19±0.05
护套 Jacket	FEP	1.6±0.13

电气性能 Electrical Properties

电容 Capacitance(pF/m)	95.1
阻抗 Impedance(ohm)	50
传输速率 Velocity of propagation(%)	70
工作频率 Operating frequency(GHz)	109
灭晕电压 Corona Extinction Voltage	1000V RMS @60Hz
承受电压 Voltage Withstanding	2000V RMS @60Hz

机械性能和环境性能 Mechanical and Environmental Properties

最小弯曲半径（一次）Min. bending radius(mm)（single）	7.63
最小弯曲半径（重复）Min. bending radius(mm)（dynamic）	50
工作温度范围 Operating temperature range(℃)	-40℃~+125℃

衰减、功率（20℃ 海平面测试条件）Typical Attenuation(@20℃ at Sea Level) dB/m and Power Handling W

频率 Frequency (GHz)	衰减 Attenuation (dB/m)	功率 Power Handling(W)
0.5	0.787	67.4
1.0	1.122	47.4
5.0	2.585	20.7
10.0	3.734	14.4
20.0	5.443	9.9

Draft	Checker	Approved	Date	Rev.	ECN	Name	Date
Lai	Ni Wenjun	Grisson	22.10.2010	a	-----	Lai	22.10.2010
Gwave Technology Inc. 4 th Floor,New Material Plaza,Yongfeng Hi-Tech Base,Haidian District,Beijing ,China(100094) www.gwave-tech.com					Tel.: +86 10 58937305/06 Fax: +86 10 58937307 email: gwave@gwave-tech.com		Page 1 / 1