

Variable Attenuators

Gwave®

Variable Attenuators, 0.5-6GHz, 26dB Attenuation

GVAT005060-25


Electrical Specifications

Frequency Range(GHz)	0.5~6
Attenuation Range(dB)	26
Input Return Loss (dB)	10(8 to 15)
Output Return Loss (dB)	10(8 to 15)
Operating DC Voltage(volts)	5
Control DC Voltage(volts)	0-5

Absolute Maximum Ratings

Source Voltage(volts)	+5.5
RF input Power (dBm)	30
Operating Temperature(.c)	-40 ~ 85
Storage Temperature(.c)	-65~150

Outline Drawing

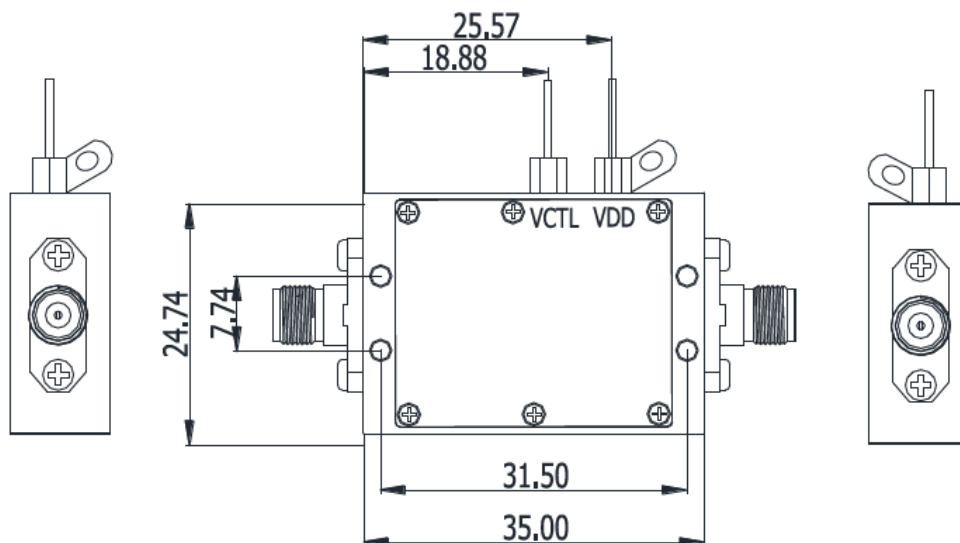

Notes