


ELECTRICAL SPECIFICATIONS

FREQUENCY RANGE (GHz):	2.000 - 4.000
IMPEDANCE:	50 Ohms
VSWR:	1.25:1 TYP/1.30:1 MAX
INSERTION LOSS (dB):	0.40 TYP/0.50 MAX
ISOLATION (dB):	20 TYP/18.5 MIN
POWER (AVG):	2 W

MECHANICAL SPECIFICATIONS

CONNECTORS:	N-FEMALE, BRASS, NICKEL PLATE
CONTACT PINS:	BERYLLIUM COPPER, GOLD PLATE
OPERATING TEMPERATURE:	0°C TO +50°C
WEIGHT (NOMINAL):	5.6 oz.

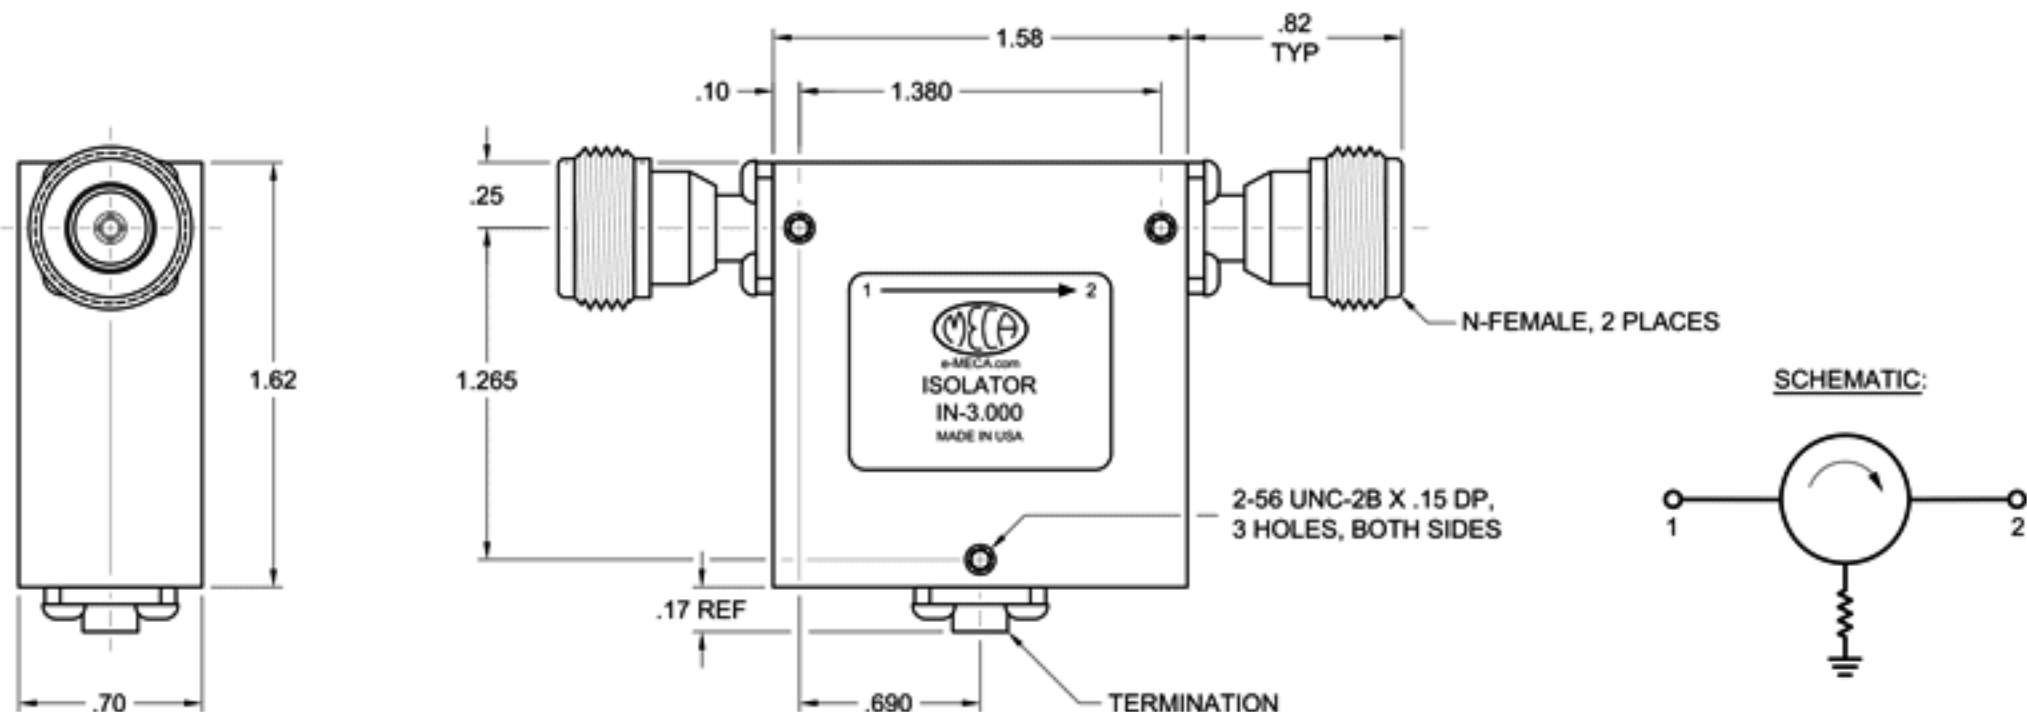

This document gives only a description of the product(s) and shall not form part of any contract. Please contact a MECA Applications Engineer for the most current specification drawing.

MATERIAL: SEE ABOVE		UNLESS OTHERWISE SPECIFIED, DIMENSIONS ARE IN INCHES			ELECTRONICS, INC. DENVER, NEW JERSEY e-MECA.com	
FINISH: SEE ABOVE		TOLERANCES 2 PLACES: ±.03 3 PLACES: ±.010 ANGLES: N/A			TITLE ISOLATOR, 2.000 - 4.000 GHz, N-FEMALE	
DRAWN:	DATE:	TIR: N/A		CAGE CODE NO. 22424	DRAWING NO. IN-3.000	
APPROVED:	DATE:	SCALE: NTS	SIZE A			
SHEET: 1 OF 1						