
## **CONNECTOR DATASHEET**



## STRAIGHT PLUG

## J30J-15TJL-300

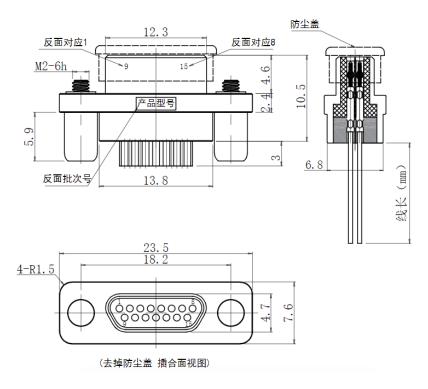

## \*Dimensions are in mm

| Electrical Specification                        | ns                          |
|---|-----------------------------|
| Dielectric Withstand Voltage                    | ≥800V                       |
| Contact Resistance                              | ≤10m Ω                      |
| Rated Current                                   | 1.2A                        |
| Insulation Resistance                           | ≥ <b>5000M</b> Ω            |
| Leakage Current                                 | ≤3.0mA                      |
| Wire Specifications                             | AFR-250,0.12mm <sup>2</sup> |
| Materials Information  Center Contact           | Brass Gold Plated           |
| B 1   |                             |
| Body  | Aluminum Nickel Plated      |
| Dielectric                                      | Aluminum Nickel Plated  LCP |
| Dielectric                                      |                             |
| · · · · · · · · · · · · · · · · · · ·           |                             |
| Dielectric  Environmental Data                  | LCP                         |
| Dielectric  Environmental Data  Mechanical Life | LCP<br>≥500                 |

While the information has been carefully compiled to the best of our knowledge, nothing is intended as representation or warranty on our part and no statement herein shall be construed as recommendation to infringe existing patents. In the effort to improve our products, we reserve the right to make changes judged to be necessary.

| Gwave Technology Inc.  |
|--|
| 4 <sup>th</sup> Floor,New Material Plaza,Yongfeng Hi-Tech Base,Haidian |
| District, Beijing , China (100094) www.gwave-tech.com                  |

Tel.: +86 10 86484190 Fax: +86 10 86484190-0 email: gwave@gwave-tech.com Page

1/1