


MODEL No:

MINI-FAKRA-R1392

NOTE:Information herein is believed by Gwave to be accurate.However,Gwave assumes no responsibility for any omissions or errors inaccuracies for its use or for any infringements of patents or other rights of third parties that may result from its use.Data is intended for informational purpose only and does not constitute a contract of sale or any express or implied warranty,including any warranty of merchat ability or fitness for a particular purpose.

RoHS Outline Drawing

外观图

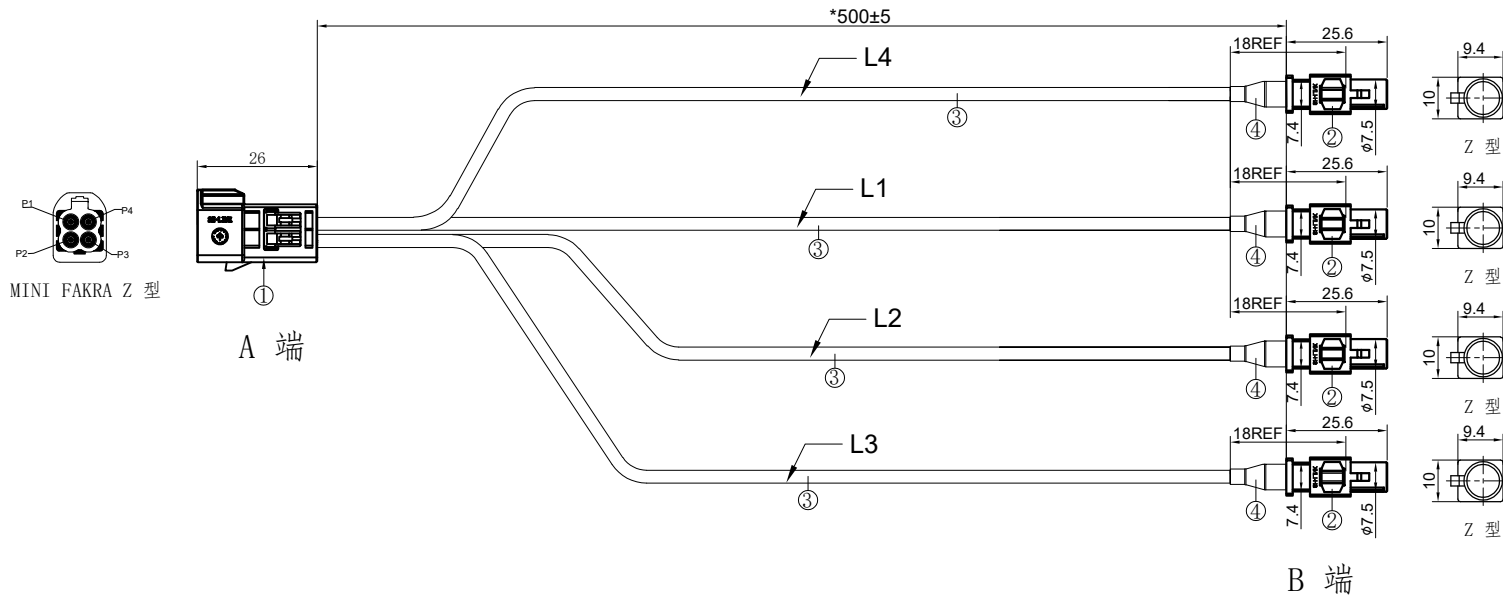

| MINI FAKRA 四合一接头 | FAKRA接头 |
|---------------------|---------------------|
| P1 | L1-FAKRA Z型公头-500MM |
| P2 | L2-FAKRA Z型公头-500MM |
| P3 | L3-FAKRA Z型公头-500MM |
| P4 | L4-FAKRA Z型公头-500MM |

| NO | 项目 | 要求详细内容 |
|--|------|---|
| 1 | 性能要求 | 1. 频率Frequency: 0~6GHz 2. 阻抗Impedance: 50Ω |
| 2 | 包装要求 | 1PCS/扎, 5扎/PE袋, 即5PCS/袋 |
| 备注: 1. *表示重点管控尺寸 3. 产品符合RoHS2.0和REACH标准 2. ()表示需检测的尺寸 | | |

| | | | |
|----|-------------------|-----------------|-------|
| 4 | THIMBLE 热缩管 | 黑色 L=18MM | 4 |
| 3 | CABLE 线材 | RG174LL L=500MM | 4 |
| 2 | FAKRA Z型公头 | Z型 水蓝色 | 4 |
| 1 | MINI FAKRA四合一Z型公头 | Z型 水蓝色 | 1 |
| NO | DESCRIPTION描述 | SPECIFICATION规格 | QTY数量 |

1.ALL DIMENSIONS ARE IN MM.AII ANGLES ARE IN DEGREES.
NOTES:UNLESS OTHERWISE SPECIFIED.

| | | | |
|---|----------------------|-------|-----------------|
| REV A | PROTOTYPE RELEASE | DATE: | APRVD: DATE: |
|  Technical Confirmation Form | | | |

| | | | |
|-----------------------------------|-------|---------|-------------|
| TITLE: MINI-FAKRA-R1392 | | | |
| DRN BY: | DATE: | DWG NO. | REV. 1.0 |
| SHEET:1 OF 1 | | | |