


MMCX Female Connector PCB Mount Soldering,DC-6GHz

MMCX-KHD1E

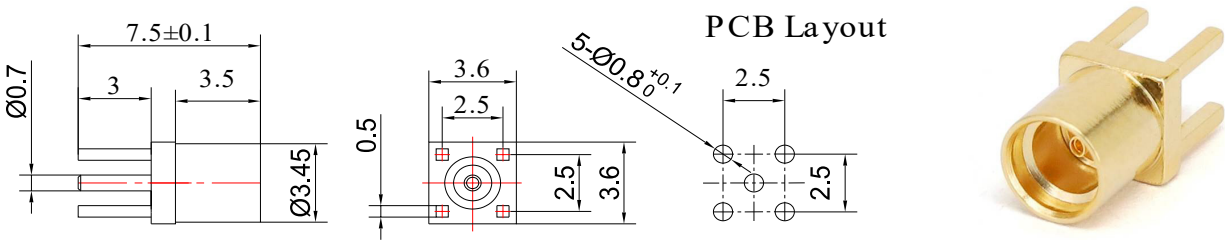

Dimensions are in mm

Product Configuration

Body Style	Straight
Connector Series	MMCX
Connector Polarity	Standard
Connector Gender	Female
Termination Type	PCB
Connector Impedance (Ohm)	50
Mount Method	None

Electrical Specifications

Frequency	DC-6GHz
VSWR	1.2
Insertion Loss	≤0.1 xSqt.(f_GHz)

Mechanical Data

Mating Cycles, Min	≥500
Weight	0.26
Body Material	Brass
Body Plating	Gold

Enviromental Specifications

RoHS Compliant	Yes
Operating Temperature Range	-55 °C to +165 °C
MIL/STD	N/A