
## **LOAD DATASHEET**



## N FEMALE LOAD

## N-K-03S

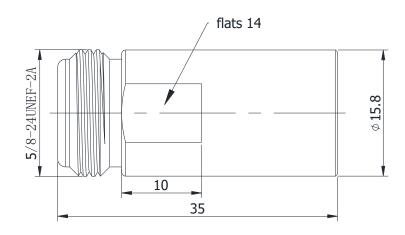

<sup>\*</sup>Dimensions are in mm

Configuration	
Connector 1 Type	N Female
Connector 1 Impedance	50 Ohms
Connector 1 Polarity	Standard
<b>Electrical Specification</b>	ons
Frequency	DC to 18 GHz
Insertion Loss (dB)	None
VSWR /Return Loss	1.15 to 18 GHz
Power	2W
<b>Materials Informatio</b>	n
Center Contact	CuBe Gold Plated
Outer Contact	Stainless Steel
Body	Stainless Steel
Dielectric	PEI
<b>Environmental Data</b>	
Temperature Range	-40°C to +165°C
2011/65/EU(RoHS)	Compliant

While the information has been carefully compiled to the best of our knowledge, nothing is intended as representation or warranty on our part and no statement herein shall be construed as recommendation to infringe existing patents. In the effort to improve our products, we reserve the right to make changes judged to be necessary.

Gwave Technology Inc.	
4th Floor, New Material Plaza, Yongfeng Hi-Tech Base, Ha	aidian
District, Beijing , China (100094) www.gwave-tech.com	1