


SMA ATTENUATOR

SMA-CA150-1

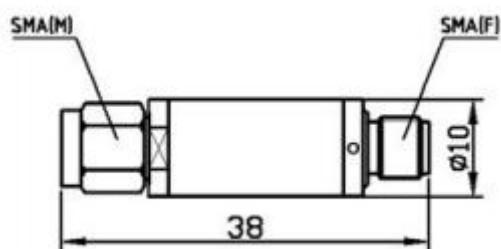

*Dimensions are in mm

Configuration

| | |
|-----------------------|------------|
| Connector 1 Type | SMA Male |
| Connector 1 Impedance | 50 Ohms |
| Connector 1 Polarity | Standard |
| Connector 2 Type | SMA Female |
| Connector 2 Impedance | 50 Ohms |
| Connector 2 Polarity | Standard |

Electrical Specifications

| | |
|---------------------------|-------------------------|
| Frequency | DC to 1 GHz |
| Attenuation Value (dB) | 50 |
| Attenuation Accuracy (dB) | ±0.8 |
| VSWR /Return Loss | ≤1.2 |
| Average Power(W) | 2 |
| peak power(KW) | 0.5 (5 μs 脉宽, 0.4%负载周期) |

Materials Information

| | |
|-----------------------|-------------------|
| Male Center Contact | CuBe Gold Plated |
| Female Center Contact | Brass Gold Plated |
| Body | Stainless Steel |

Environmental Data

| | |
|-------------------|-----------------|
| Temperature Range | -55°C to +125°C |
| 2002/95/EC(RoHS) | Compliant |