
## **CONNECTOR DATASHEET**



## SMA RIGHT ANGLE PLUG

## **SMA-JW5**

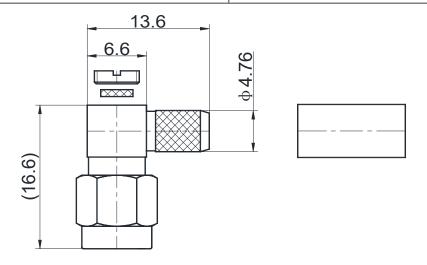

\*Dimensions are in mm

Configuration		
Connector Type	SMA Male	
Connector Impedance	50 Ohms	
Connector Polarity	Standard	
Body Style	Right Angle	
Connector Mount Method	None	
Connector 2 Interface Type	RG142,RG223	
Attachment Method	Solder&Crimp	
Electrical Specifications		
Frequency	DC to 6GHz	
Insertion Loss (dB)	≤ 0.1 xSqt.(f_GHz)	
Return loss/VSWR	1.25 to 6GHz	
Materials Information		
Centre Contact	Brass Gold Plated	
Outer Contact	Brass Gold Plated	
Body	Brass Gold Plated	
Dielectric	PTFE	
Environmental Data		
Temperature Range	-40°C to +125°C	
2011/65/EU(RoHS)	Compliant	
	·	

While the information has been carefully compiled to the best of our knowledge, nothing is intended as representation or warranty on our part and no statement herein shall be construed as recommendation to infringe existing patents. In the effort to improve our products, we reserve the right to make changes judged to be necessary.

Gwave Technology Inc.	
4th Floor, New Material Plaza, Yo	ngfeng Hi-Tech Base,Haidian
District, Beijing , China (100094)	www.gwave-tech.com

Tel.: +86 10 86484190 Fax: +86 10 86484190-0 email: gwave@gwave-tech.com Page

1/1