

RF SWITCH



2 Way SMA Switch, 12V, TTL



SPDT18G12VT

Electrical Specifications

Frequency (GHz)	VSWR(max)	Insertion Loss (dB) (max)	Isolation (dB) (min)
DC-6	1.20	0.20	70
6-12	1.30	0.25	70
12-18	1.40	0.40	60
Voltage (VDC)		12	
Current (mA)		200	
Switching Time Max(ms)		15	

Mechanical Specifications

Connector Port	SMA Female
Weight Max(g)	70
Contact Material	Plated Au
Temperature Range	-25℃ to +65℃

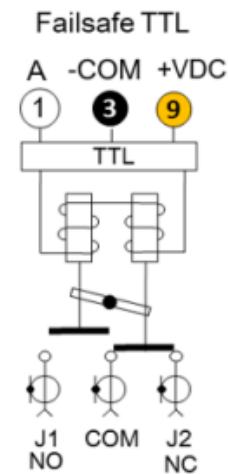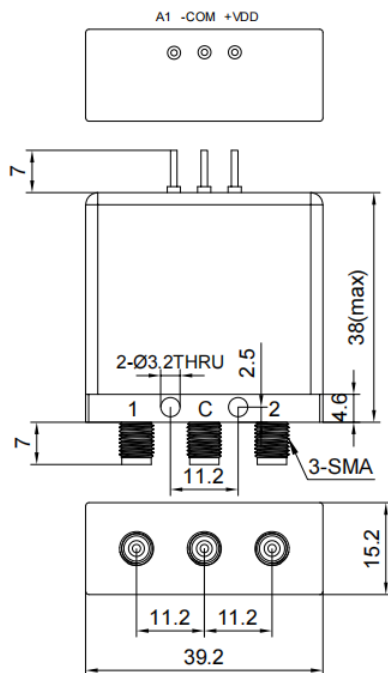

*Dimensions are in mm

(1)TTL logic input A(n):low “0” =0.0V-0.8V; high “1” =2.4V-5.5V.

(2)-COM = GROUND ; +VDC=+Rated Voltage