


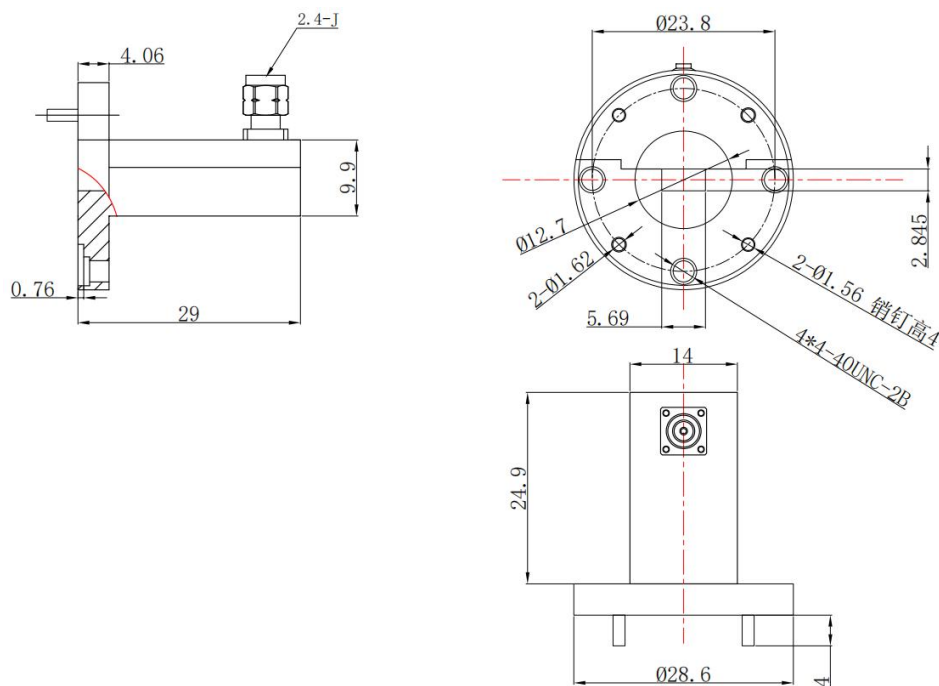

*Dimensions are in mm

Configuration

Connector Type	2.4 Male
Connector Impedance	50 Ohms
Connector Polarity	Standard
Waveguide Type	WR22
Flange	FUGP400
Adapter Body Style	Right Angle

Electrical Specifications

Frequency	32.9 to 50.1 GHz
Insertion Loss (dB)	≤1.1
VSWR /Return Loss	≤1.3

Materials Information

Body Material	Brass
Body Plating	Gold

Environmental Data

Operating Temperature Range	-40°C to +125°C
2011/65/EU(RoHS)	Compliant

While the information has been carefully compiled to the best of our knowledge, nothing is intended as representation or warranty on our part and no statement herein shall be construed as recommendation to infringe existing patents. In the effort to improve our products, we reserve the right to make changes judged to be necessary.