
WAVEGUIDE DATASHEET	Gwave
Waveguide To Coax Adaptor	**WR229/SMA-K-V**

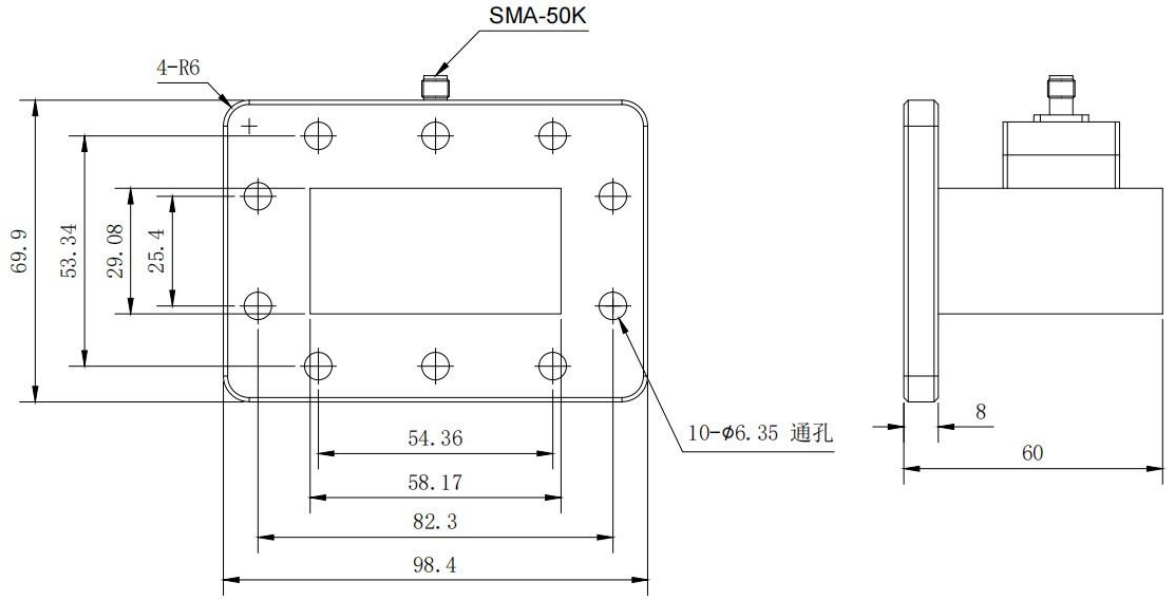

*Dimensions are in mm

Configuration

Connector Type	SMA Female
Connector Impedance	50 Ohms
Connector Polarity	Standard
Waveguide Type	WR229
Flange	FDP40
Adapter Body Style	Right Angle

Electrical Specifications

Frequency	3.22 to 4.9 GHz
VSWR /Return Loss	1.25

Materials Information

Body Material	AL
Body Plating	Paint

Environmental Data

2011/65/EU(RoHS)	Compliant
Operating Temperature Range	-55°C to 125°C

While the information has been carefully compiled to the best of our knowledge, nothing is intended as representation or warranty on our part and no statement herein shall be construed as recommendation to infringe existing patents. In the effort to improve our products, we reserve the right to make changes judged to be necessary.

Gwave Technology Inc.
4th Floor,New Material Plaza,Yongfeng Hi-Tech Base,Haidian District,Beijing ,China(100094) www.gwave-tech.com
Tel.: +86 10 86484190
Fax: +86 10 86484190-0
email: gwave@gwave-tech.com