


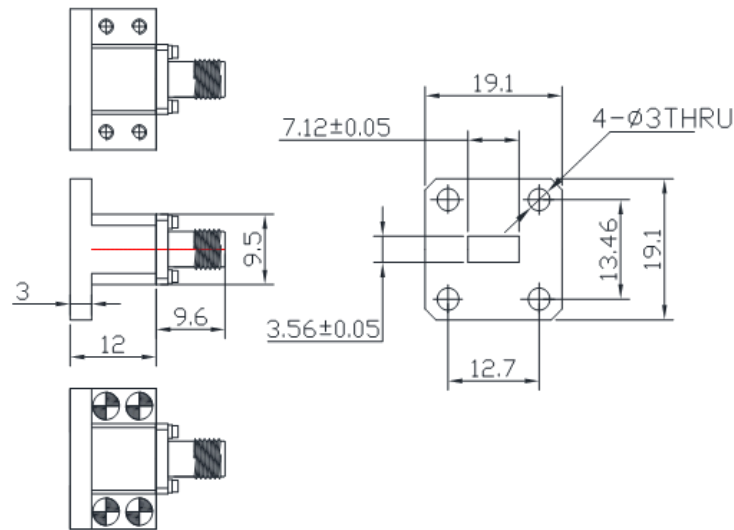

*Dimensions are in mm

Configuration

Connector Type	2.92mm Female
Connector Impedance	50 Ohms
Connector Polarity	Standard
Waveguide Type	WR28
Flange	UBR320
Adapter Body Style	Straight

Electrical Specifications

Frequency	26.5 to 40 GHz
Insertion Loss (dB)	≤ 0.25
VSWR /Return Loss	1.25

Materials Information

Waveguide Material and Plating	Brass Gold Plated
Connector Material and Plating	Stainless Steel(304) Passivated
Center Contact and Plating	Beryllium Copper Gold Plated

Environmental Data

Temperature Range	-30°C to +70°C
2011/65/EU(RoHS)	Compliant

While the information has been carefully compiled to the best of our knowledge, nothing is intended as representation or warranty on our part and no statement herein shall be construed as recommendation to infringe existing patents. In the effort to improve our products, we reserve the right to make changes judged to be necessary.